

# Product data sheet

## Ilme connectoren

hood, high, size 57.27, C-TYPE alu, 2 pegs, 1xM40 top




MAV 10 L40


<https://www.ac-solutions.be/nl/product/mav10l40>



CHO L (CAO) MHO L (MAO L)  
CHV L (CAV L) MHV L (MAV L)

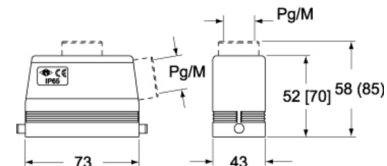

CHV L (CAV LG), MHV LG (MAV LG) [MFV LG]

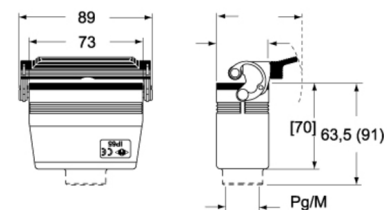

## Specificaties

### General characteristics

|                             |                      |
|-----------------------------|----------------------|
| Enclosure type              | Hood                 |
| Size                        | 57.27                |
| Enclosure series            | C-TYPE               |
| Closing type                | With 2 pegs          |
| Locking mechanism           | Single locking lever |
| Protection degree           | IP65 / IP66 / IP69   |
| Ambient lower temperature   | -40 °C               |
| Ambient upper temperature   | 125 °C               |
| Operation lower temperature | -40 °C               |
| Operation upper temperature | 125 °C               |
| Cable entry type            | top cable entry      |
| Cable entry size            | M40                  |
| Position cable feed         | Top entry            |
| Height                      | 85 mm                |
| Width                       | 43 mm                |
| Length                      | 73 mm                |

## Material

# Product data sheet

## Ilme connectoren

hood, high, size 57.27, C-TYPE alu, 2 pegs, 1xM40 top



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |