

Product data sheet


Ilme connectoren

hood, high, size 77.27, C-TYPE alu, 2 levers, 1xM40 top




MAV 16 X40


<https://www.ac-solutions.be/nl/product/mav16x40>

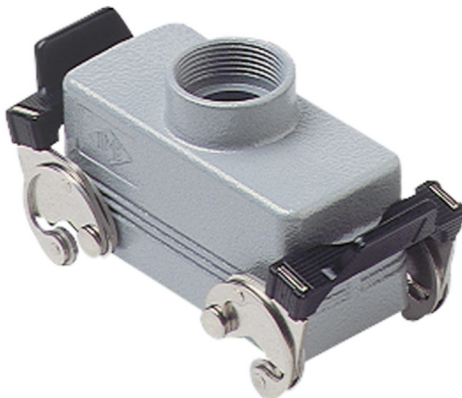

CHO X (CAO X) - MHO X (MAO X)

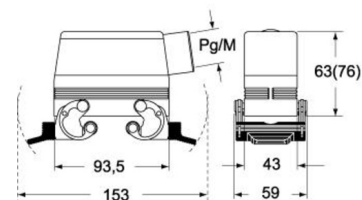

CHV X (CAV X) - MHV X (MAV X)

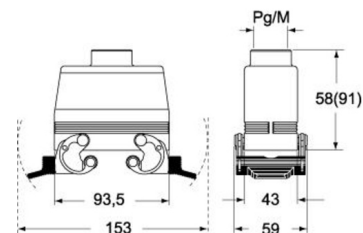

Specificaties

General characteristics

Enclosure type	Hood
Size	77.27
Enclosure series	C-TYPE
Closing type	With 2 levers
Locking mechanism	Double locking levers
Protection degree	IP65 / IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry
Cable entry size	M40
Position cable feed	Top entry
Height	91 mm
Width	59 mm
Length	93.5 mm

Product data sheet

Ilme connectoren

hood, high, size 77.27, C-TYPE alu, 2 levers, 1xM40 top



Remark	May be combined with enclosures: CHI 16 CS,CHI 16 CP,CHI 16 C,CHP 16 CS,CHP 16 CP,CHP 16 C,CAP 16 CS,CAP 16 CP,CAP 16 C,MHP 16 CS,MHP 16 CP,MAP 16 CS,MAP 16 CP
--------	---

Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With interlocking device