

# Product data sheet


## Ilme connectoren

hood, size 104.27, BIG alu, 4 pegs, 2xM50 top, 2xM50 side, extended terminal compartment



MBVO 24.250

<https://www.ac-solutions.be/nl/product/mbvo24250>

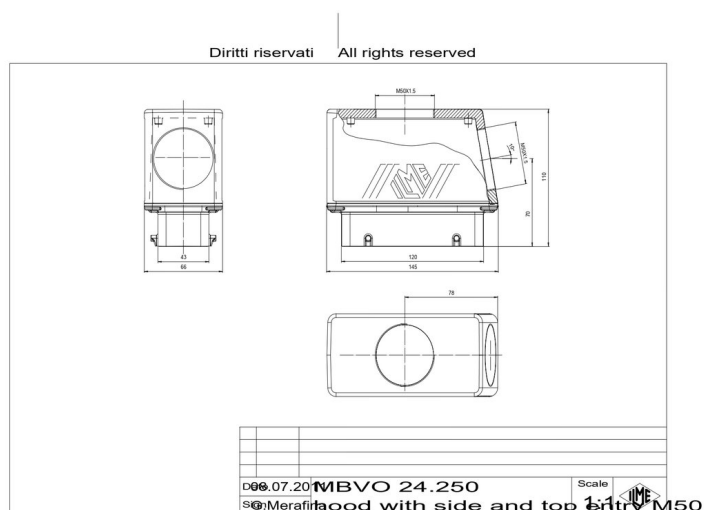

## Specificaties

### General characteristics

|                             |                          |
|-----------------------------|--------------------------|
| Enclosure type              | Hood                     |
| Size                        | 104.27                   |
| Enclosure series            | BIG                      |
| Closing type                | With 4 pegs              |
| Locking mechanism           | Double locking levers    |
| Protection degree           | IP66                     |
| Ambient lower temperature   | -40 °C                   |
| Ambient upper temperature   | 125 °C                   |
| Operation lower temperature | -40 °C                   |
| Operation upper temperature | 125 °C                   |
| Cable entry type            | top and side cable entry |
| Cable entry size            | M50 x 2                  |
| Position cable feed         | Two-sided                |
| Height                      | 110 mm                   |
| Width                       | 66 mm                    |
| Length                      | 145 mm                   |

## Material

# Product data sheet

## Ilme connectoren

hood, size 104.27, BIG alu, 4 pegs, 2xM50 top, 2xM50 side, extended terminal compartment



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |