

Product data sheet


Ilme connectoren

hood, high, size 66.40, C-TYPE alu, 2 levers, 1xM25 top, no adaptor



MFV 50 X25

<https://www.ac-solutions.be/nl/product/mfv50x25>

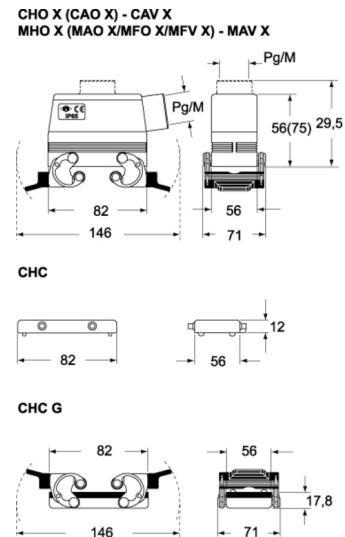

Specificaties

General characteristics

Enclosure type	Hood
Size	66.40
Enclosure series	C-TYPE
Closing type	With 2 levers
Locking mechanism	Double locking levers
Protection degree	IP65 / IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry
Cable entry size	M25
Position cable feed	Top entry
Height	76.5 mm
Width	56 mm
Length	82 mm
Remark	May be combined with enclosures: CHI 50 CS, CHP 50 CS, MHP 50 CS

Product data sheet

Ilme connectoren

hood, high, size 66.40, C-TYPE alu, 2 levers, 1xM25 top, no adaptor



Remark 2

Enclosure without adaptor, threaded on the body, to be used only with a complete cable gland

Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With interlocking device