

# Product data sheet


## Ilme connectoren

hood, high, size 44.27, LS-type alu, 1 lever, 1xM25 top, no adaptor



MFVN 06 LG25

<https://www.ac-solutions.be/nl/product/mfvn06lg25>

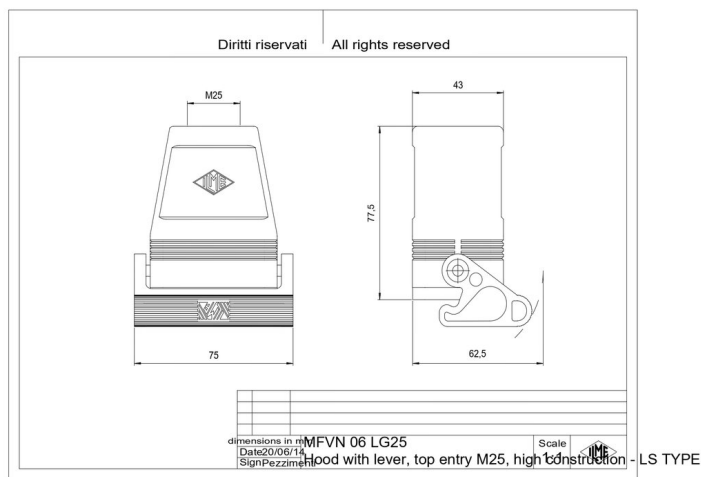

## Specificaties

### General characteristics

|                             |                      |
|-----------------------------|----------------------|
| Enclosure type              | Hood                 |
| Size                        | 44.27                |
| Enclosure series            | LS-TYPE              |
| Closing type                | With 1 lever         |
| Locking mechanism           | Single locking lever |
| Protection degree           | IP65                 |
| Ambient lower temperature   | -40 °C               |
| Ambient upper temperature   | 125 °C               |
| Operation lower temperature | -40 °C               |
| Operation upper temperature | 125 °C               |
| Cable entry type            | top cable entry      |
| Cable entry size            | M25                  |
| Position cable feed         | Top entry            |
| Height                      | 77.5 mm              |
| Width                       | 62.5 mm              |
| Length                      | 75 mm                |

## Material

# Product data sheet

## Ilme connectoren

hood, high, size 44.27, LS-type alu, 1 lever, 1xM25 top, no adaptor



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With powder coating                                       |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |