

Product data sheet


Ilme connectoren

double housing, angled, IP68 alu, screw locking, 1xM25, with 2x CGK I integrated, for inserts
21.21



MGK 2AP25

<https://www.ac-solutions.be/nl/product/mgk2ap25>

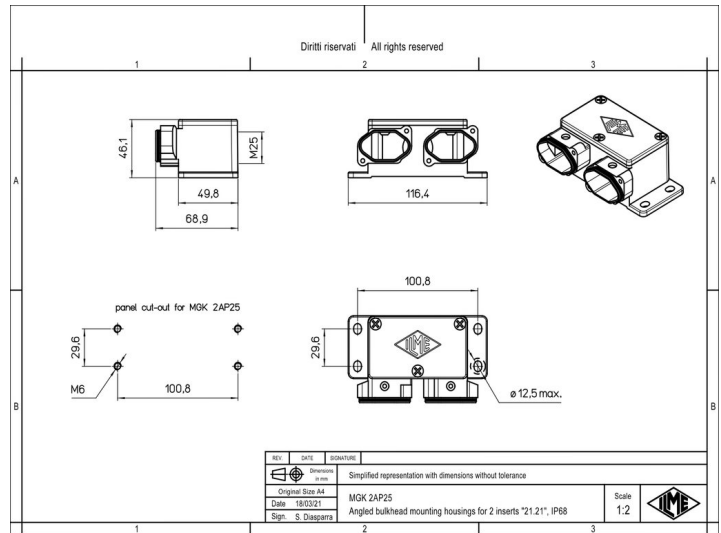

Specificaties

General characteristics

Enclosure type	Double angled housing
Size	21.21
Enclosure series	IP68
Closing type	With 4 screws
Locking mechanism	With 4 screws
Protection degree	IP66 / IP68 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M25
Position cable feed	Side entry
Height	46.1 mm
Width	49.8 mm
Length	116.4 mm

Material

Product data sheet

Ilme connectoren

double housing, angled, IP68 alu, screw locking, 1xM25, with 2x CGK I integrated, for inserts
21.21



Material housing	Die cast aluminium alloy
Coating housing	With epoxy thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2