

# Product data sheet


## Ilme connectoren

hood, size 57.27, IP68 alu, bayonet locking, 1xM40 top



MGV 10.40 B

<https://www.ac-solutions.be/nl/product/mgv1040b>

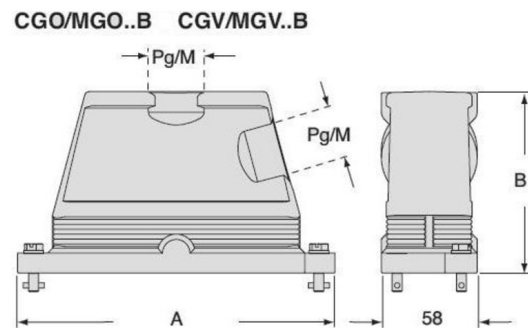

|         |              | A   | B   |
|---------|--------------|-----|-----|
| CGO/MGO | CGV/MGV 06 B | 133 | 101 |
| CGO/MGO | CGV/MGV 10 B | 146 | 101 |
| CGO/MGO | CGV/MGV 16 B | 166 | 111 |
| CGO/MGO | CGV/MGV 24 B | 193 | 111 |

## Specificaties

### General characteristics

|                             |                    |
|-----------------------------|--------------------|
| Enclosure type              | Hood               |
| Size                        | 57.27              |
| Enclosure series            | IP68               |
| Closing type                | With 2 bayonets    |
| Locking mechanism           | With 2 bayonets    |
| Protection degree           | IP66 / IP68 / IP69 |
| Ambient lower temperature   | -40 °C             |
| Ambient upper temperature   | 125 °C             |
| Operation lower temperature | -40 °C             |
| Operation upper temperature | 125 °C             |
| Cable entry type            | top cable entry    |
| Cable entry size            | M40                |
| Position cable feed         | Top entry          |
| Height                      | 101 mm             |
| Width                       | 58 mm              |
| Length                      | 146 mm             |

## Material

# Product data sheet

## Ilme connectoren

hood, size 57.27, IP68 alu, bayonet locking, 1xM40 top



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy thermosetting powder coating                   |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |