

Product data sheet


Ilme connectoren

hood, size 104.27, IP68 E-Xtreme alu, screw locking, 2xM32 top



MGVE 24.232

<https://www.ac-solutions.be/nl/product/mgve24232>

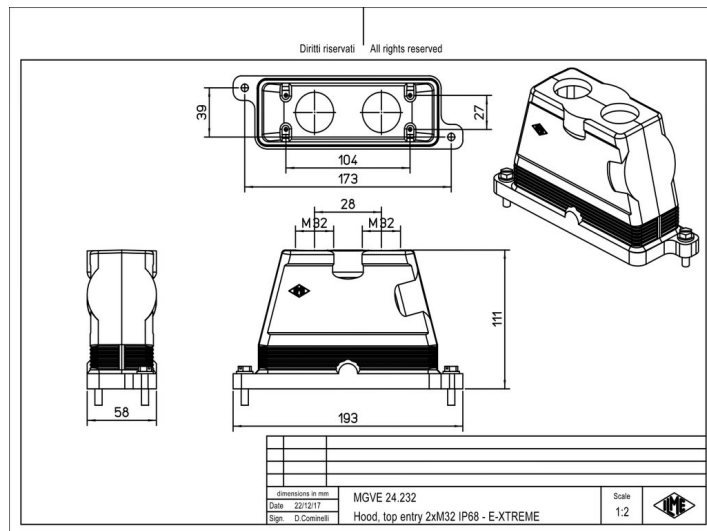

Specificaties

General characteristics

Enclosure type	Hood
Size	104.27
Enclosure series	E-Xtreme® IP68
Closing type	With 2 screws
Locking mechanism	With 2 screws
Protection degree	IP66 / IP68 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry
Cable entry size	M32 x 2
Position cable feed	Top entry
Height	111 mm
Width	58 mm
Length	193 mm
Remark	FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C)

Product data sheet

Ilme connectoren

hood, size 104.27, IP68 E-Xtreme alu, screw locking, 2xM32 top



Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2