

# Product data sheet


## Ilme connectoren

hood, size 104.27, C-TYPE alu, 2 levers, 1xM32 side



MHO 24 X32

<https://www.ac-solutions.be/nl/product/mho24x32>

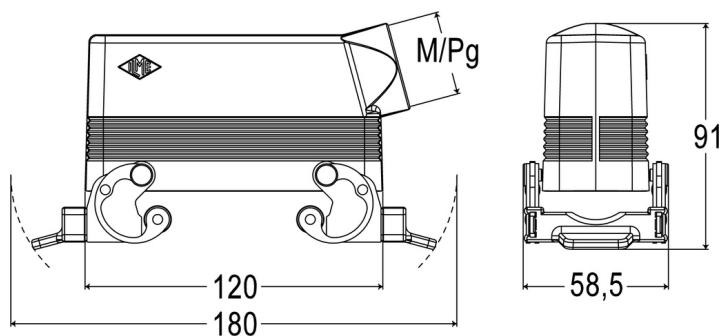

## Specificaties

### General characteristics

|                             |                       |
|-----------------------------|-----------------------|
| Enclosure type              | Hood                  |
| Size                        | 104.27                |
| Enclosure series            | C-TYPE                |
| Closing type                | With 2 levers         |
| Locking mechanism           | Double locking levers |
| Protection degree           | IP65 / IP66 / IP69    |
| Ambient lower temperature   | -40 °C                |
| Ambient upper temperature   | 125 °C                |
| Operation lower temperature | -40 °C                |
| Operation upper temperature | 125 °C                |
| Cable entry type            | side cable entry      |
| Cable entry size            | M32                   |
| Position cable feed         | Side entry            |
| Height                      | 63 mm                 |
| Width                       | 59 mm                 |
| Length                      | 120 mm                |

# Product data sheet

## Ilme connectoren

hood, size 104.27, C-TYPE alu, 2 levers, 1xM32 side



|        |                                                                                                                                                                 |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Remark | May be combined with enclosures: CHI 24 CS,CHI 24 CP,CHI 24 C,CHP 24 CS,CHP 24 CP,CHP 24 C,CAP 24 CS,CAP 24 CP,CAP 24 C,MHP 24 CS,MHP 24 CP,MAP 24 CS,MAP 24 CP |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Material

|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |