

# Product data sheet


## Ilme connectoren

surface mounting housing, size 57.27, C-TYPE alu, 4 pegs, 2xM20 side, cover plastic




MHP 10 CP220


<https://www.ac-solutions.be/nl/product/mhp10cp220>

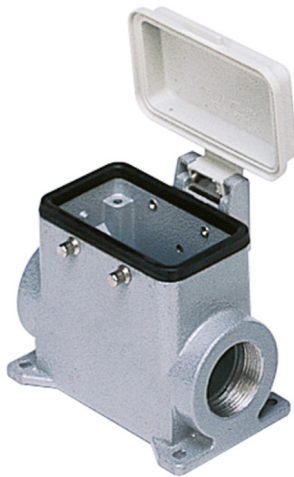

CHP CAP - MHP MAP



CHP CS/CP CAP CS/CP - MHP CS/CP MAP CS/CP



|                 | A  | B  | C  |
|-----------------|----|----|----|
| CHP L / MHP L   | 57 | 40 | 52 |
| CAP L / MAP L   | 73 | 45 | 57 |
| CHP CS / MHP CS | 57 | 40 | 52 |
| CAP CS / MAP CS | 73 | 45 | 57 |
| CHP CP / MHP CP | 57 | 40 | 52 |
| CAP CP / MAP CP | 73 | 45 | 57 |

## Specificaties

### General characteristics

|                             |                                                                                                          |
|-----------------------------|----------------------------------------------------------------------------------------------------------|
| Enclosure type              | Surface mounting housing                                                                                 |
| Size                        | 57.27                                                                                                    |
| Enclosure series            | C-TYPE                                                                                                   |
| Closing type                | With 4 pegs                                                                                              |
| Locking mechanism           | Double locking levers                                                                                    |
| Protection degree           | IP65                                                                                                     |
| Ambient lower temperature   | -40 °C                                                                                                   |
| Ambient upper temperature   | 125 °C                                                                                                   |
| Operation lower temperature | -40 °C                                                                                                   |
| Operation upper temperature | 125 °C                                                                                                   |
| Cable entry type            | side cable entry                                                                                         |
| Cable entry size            | M20 x 2                                                                                                  |
| Position cable feed         | Two-sided                                                                                                |
| Height                      | 57 mm                                                                                                    |
| Width                       | 52 mm                                                                                                    |
| Length                      | 93.5 mm                                                                                                  |
| Remark                      | May be combined with enclosures: CHO 10 X,CAO 10 X,CHV 10 X,CAV 10 X,MHO 10 X,MAO 10 X,MHV 10 X,MAV 10 X |

# Product data sheet

## Ilme connectoren

surface mounting housing, size 57.27, C-TYPE alu, 4 pegs, 2xM20 side, cover plastic



### Material

|                                                            |                                                                           |
|------------------------------------------------------------|---------------------------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating                         |
| Inflammability class of insulation material acc. with UL94 | V2                                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With hinged lid,With interlocking device |