

Product data sheet


Ilme connectoren

surface mounting housing, size 104.62, E-Xtreme alu, 1 lever, 1xM40 side, cover metal



MHPE 48 LS40

<https://www.ac-solutions.be/nl/product/mhpe48ls40>

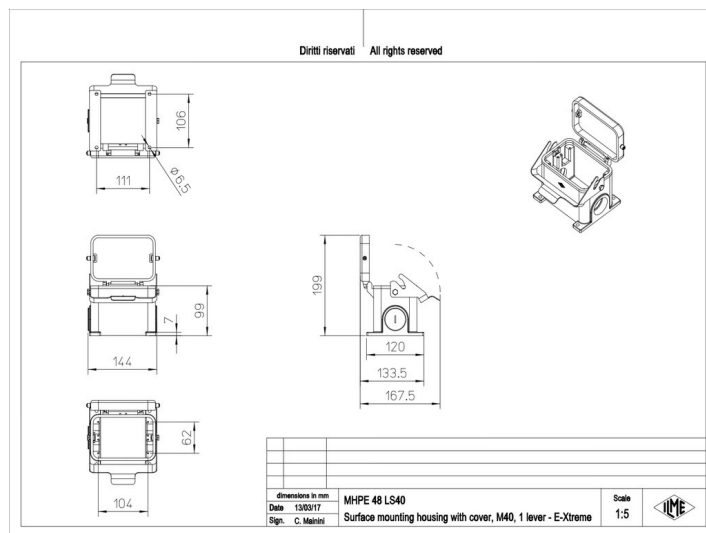

Specificaties

General characteristics

Enclosure type	Surface mounting housing
Size	104.62
Enclosure series	E-Xtreme® C-TYPE
Closing type	With 1 lever
Locking mechanism	Single locking lever
Protection degree	IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M40
Position cable feed	Top entry
Height	99 mm
Width	120 mm
Length	141 mm
Remark	FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C)

Product data sheet

Ilme connectoren

surface mounting housing, size 104.62, E-Xtreme alu, 1 lever, 1xM40 side, cover metal



Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2