


surface mounting housing, size 66.40, C-TYPE alu, 2 levers stainless steel, 1xM32 side

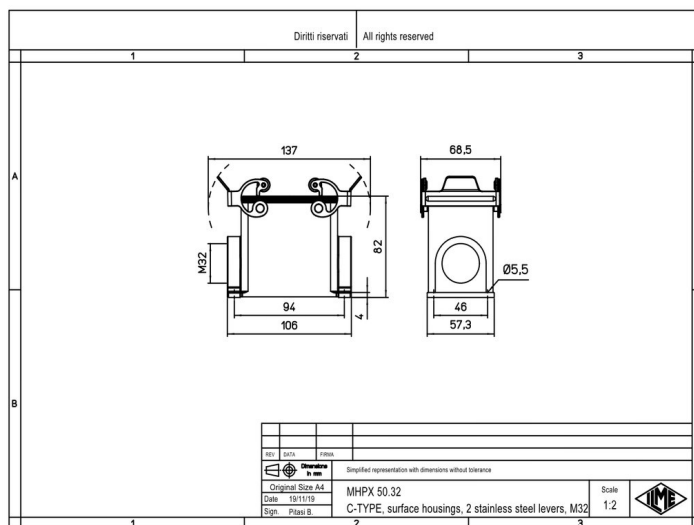

General characteristics

Enclosure type	Surface mounting housing
Size	66.40
Enclosure series	C-TYPE
Closing type	With 2 levers
Locking mechanism	Double locking levers
Protection degree	IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M32
Position cable feed	Side entry
Height	82 mm
Width	46 mm
Length	94 mm

A&C Solutions BV • Slachthuisstraat 68 bus 6 • 2300 Turnhout • België • T +32 (0)14 73 53 70 • sales@ac-solutions.be • www.ac-solutions.be

Product data sheet

Ilme connectoren

surface mounting housing, size 66.40, C-TYPE alu, 2 levers stainless steel, 1xM32 side



Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2