

# Product data sheet


## Ilme connectoren

hood, size 57.27, C-TYPE alu, 2 levers, 1xM20 top



MHV 10 X20

<https://www.ac-solutions.be/nl/product/mhv10x20>

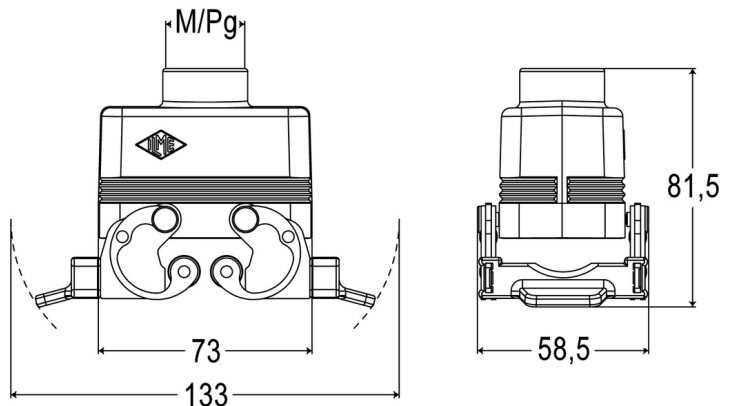

## Specificaties

### General characteristics

|                             |                       |
|-----------------------------|-----------------------|
| Enclosure type              | Hood                  |
| Size                        | 57.27                 |
| Enclosure series            | C-TYPE                |
| Closing type                | With 2 levers         |
| Locking mechanism           | Double locking levers |
| Protection degree           | IP65 / IP66 / IP69    |
| Ambient lower temperature   | -40 °C                |
| Ambient upper temperature   | 125 °C                |
| Operation lower temperature | -40 °C                |
| Operation upper temperature | 125 °C                |
| Cable entry type            | top cable entry       |
| Cable entry size            | M20                   |
| Position cable feed         | Top entry             |
| Height                      | 58 mm                 |
| Width                       | 59 mm                 |
| Length                      | 73 mm                 |

# Product data sheet

## Ilme connectoren

hood, size 57.27, C-TYPE alu, 2 levers, 1xM20 top



|          |                                                                                                                                                                 |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Remark   | may be combined with enclosures: CHI 10 CS,CHI 10 CP,CHI 10 C,CHP 10 CS,CHP 10 CP,CHP 10 C,CAP 10 CS,CAP 10 CP,CAP 10 C,MHP 10 CS,MHP 10 CP,MAP 10 CS,MAP 10 CP |
| Remark 2 | Can only be used with a complete cable gland                                                                                                                    |

## Material

|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |