
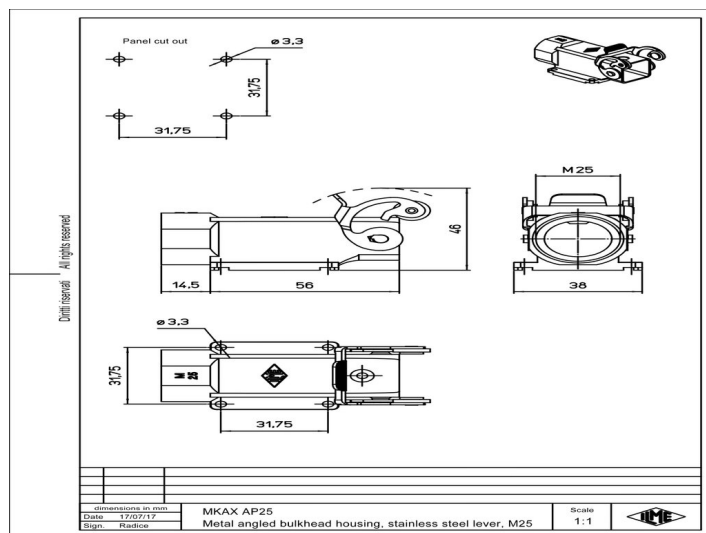


bulkhead mounting housing, angled, size 21.21, CKA zinc, 1 lever stainless steel, 1xM25 side, closed bottom

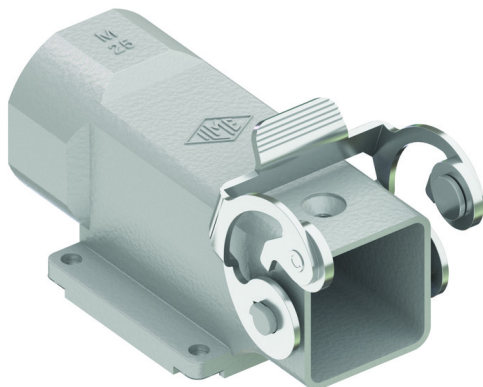

General characteristics

Enclosure type	Angled bulkhead mounting housing
Size	21.21
Enclosure series	CKA
Closing type	With 1 lever
Locking mechanism	Single locking lever
Protection degree	IP44 IP66 / IP67 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M25
Position cable feed	Side entry
Height	46 mm
Width	31.75 mm
Length	56 mm

A&C Solutions BV • Slachthuisstraat 68 bus 6 • 2300 Turnhout • België • T +32 (0)14 73 53 70 • sales@ac-solutions.be • www.ac-solutions.be

Product data sheet

Ilme connectoren

bulkhead mounting housing, angled, size 21.21, CKA zinc, 1 lever stainless steel, 1xM25 side, closed bottom



Material housing	Zinc die-cast
Coating housing	With epoxy-polyester thermosetting powder coating