

Product data sheet


Ilme connectoren

bulkhead mounting housing, angled, size 21.21, E-Xtreme alu, 1 lever stainless steel, 1xM20 side



MKAXE IAP20

<https://www.ac-solutions.be/nl/product/mkaxeiap20>

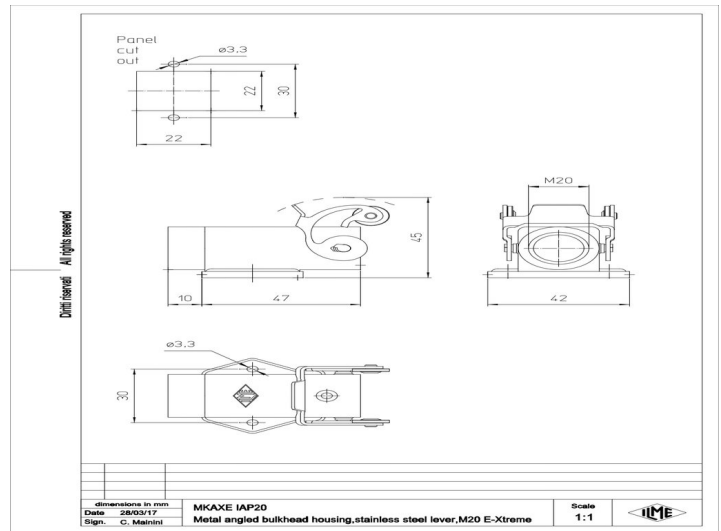

Specificaties

General characteristics

Enclosure type	Angled bulkhead mounting housing
Size	21.21
Enclosure series	E-Xtreme® C-TYPE
Closing type	With 1 lever
Locking mechanism	Single locking lever
Protection degree	IP44 IP66 / IP67 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M20
Position cable feed	Side entry
Height	45 mm
Width	30 mm
Length	42.5 mm
Remark	FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C)

Product data sheet

Ilme connectoren

bulkhead mounting housing, angled, size 21.21, E-Xtreme alu, 1 lever stainless steel, 1xM20 side



Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2