

# Product data sheet


## Ilme connectoren

bulkhead mounting housing, size 21.21, CKA zinc, 1 lever stainless steel, 1xM32-external, profiled gasket



MKAX IFC

<https://www.ac-solutions.be/nl/product/mkaxifc>

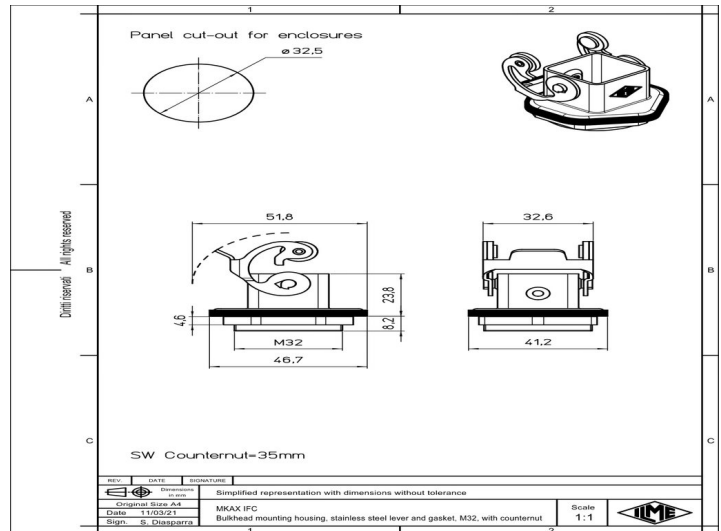

## Specificaties

### General characteristics

|                             |                           |
|-----------------------------|---------------------------|
| Enclosure type              | Bulkhead mounting housing |
| Size                        | 21.21                     |
| Enclosure series            | CKA                       |
| Closing type                | With 1 lever              |
| Locking mechanism           | Single locking lever      |
| Protection degree           | IP44   IP66 / IP67 / IP69 |
| Ambient lower temperature   | -40 °C                    |
| Ambient upper temperature   | 125 °C                    |
| Operation lower temperature | -40 °C                    |
| Operation upper temperature | 125 °C                    |
| Cable entry type            | round threaded appendix   |
| Cable entry size            | M32                       |
| Position cable feed         | Below                     |
| Height                      | 23.8 mm                   |
| Width                       | 41.2 mm                   |
| Length                      | 46.7 mm                   |

## Material

# Product data sheet

## Ilme connectoren

bulkhead mounting housing, size 21.21, CKA zinc, 1 lever stainless steel, 1xM32-external, profiled gasket



|                  |                                                   |
|------------------|---------------------------------------------------|
| Material housing | Zinc die-cast                                     |
| Coating housing  | With epoxy-polyester thermosetting powder coating |