

# Product data sheet



## Ilme connectoren

hood, size 21.21, W-TYPE zinc, 1 rigid lever stainless steel, 1xM25 top



MKAXXW VG25

<https://www.ac-solutions.be/nl/product/mkaxxwvg25>

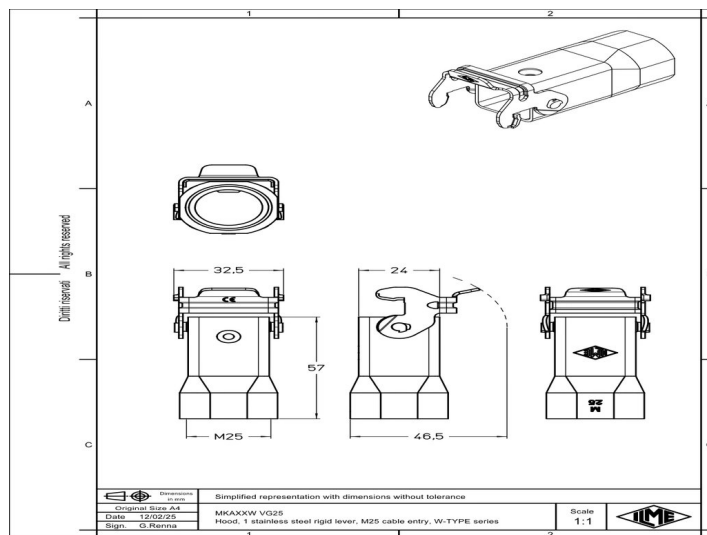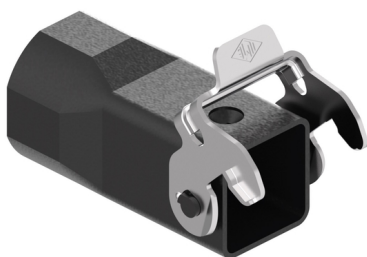

## Specificaties

### General characteristics

|                             |                           |
|-----------------------------|---------------------------|
| Enclosure type              | Hood                      |
| Size                        | 21.21                     |
| Enclosure series            | W-TYPE                    |
| Closing type                | With 1 lever              |
| Locking mechanism           | Single locking lever      |
| Protection degree           | IP44   IP66 / IP67 / IP69 |
| Ambient lower temperature   | -40 °C                    |
| Ambient upper temperature   | 125 °C                    |
| Operation lower temperature | -40 °C                    |
| Operation upper temperature | 125 °C                    |
| Cable entry type            | top cable entry           |
| Cable entry size            | M25                       |
| Position cable feed         | Top entry                 |
| Height                      | 57 mm                     |
| Width                       | 24 mm                     |
| Length                      | 32.5 mm                   |

## Material

# Product data sheet

## Ilme connectoren

hood, size 21.21, W-TYPE zinc, 1 rigid lever stainless steel, 1xM25 top



|                                                            |                                         |
|------------------------------------------------------------|-----------------------------------------|
| Material housing                                           | Zinc die-cast                           |
| Coating housing                                            | With epoxy thermosetting powder coating |
| Inflammability class of insulation material acc. with UL94 | V2                                      |