

Product data sheet


Ilme connectoren

surface mounting housing, high, size 66.16, IL-BRID alu, 1 lever, 2xM25 side



MZAP 25 L225

<https://www.ac-solutions.be/nl/product/mzap25l225>

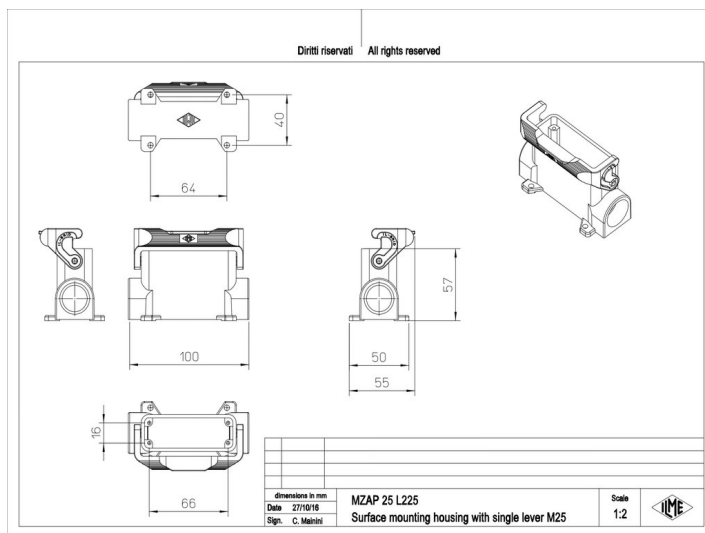

Specificaties

General characteristics

Enclosure type	Surface mounting housing
Size	66.16
Enclosure series	IL-BRID
Closing type	With 1 lever
Locking mechanism	Single locking lever
Protection degree	IP65 / IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M25 x 2
Position cable feed	Two-sided
Height	57 mm
Width	50 mm
Length	101 mm

Material

Product data sheet

Ilme connectoren

surface mounting housing, high, size 66.16, IL-BRID alu, 1 lever, 2xM25 side



Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With interlocking device