

Product data sheet


Ilme connectoren

hood, high, size 66.16, E-Xtreme alu, 2 pegs stainless steel, 1xM25 top



MZAVE 25 L25

<https://www.ac-solutions.be/nl/product/mzave25l25>

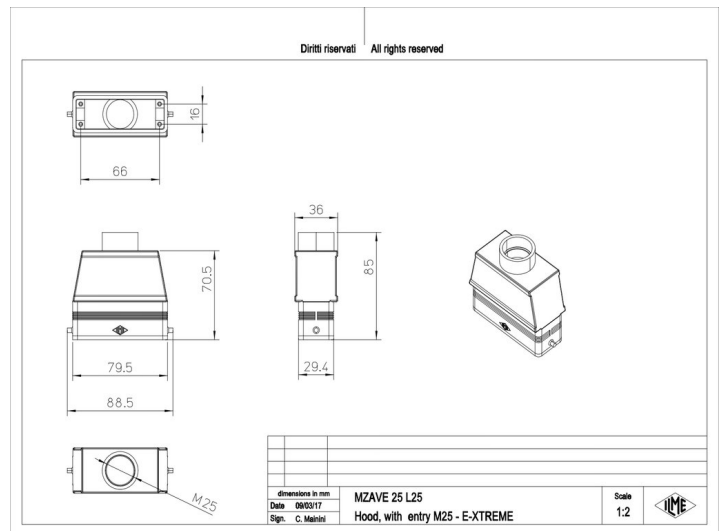

Specificaties

General characteristics

Enclosure type	Hood
Size	66.16
Enclosure series	E-Xtreme® CZ7
Closing type	With 2 pegs
Locking mechanism	Single locking lever
Protection degree	IP66 / IP67 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry with adapter
Cable entry size	M25
Position cable feed	Top entry
Height	85.5 mm
Width	36 mm
Length	79.5 mm
Remark	FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C)

Product data sheet

Ilme connectoren

hood, high, size 66.16, E-Xtreme alu, 2 pegs stainless steel, 1xM25 top



Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2