

# Product data sheet


## Ilme connectoren

hood, high, size 57.27, HNM alu, 2 pegs, 1xM32 side, no adaptor



RFO 10 L32

<https://www.ac-solutions.be/nl/product/rfo10l32>

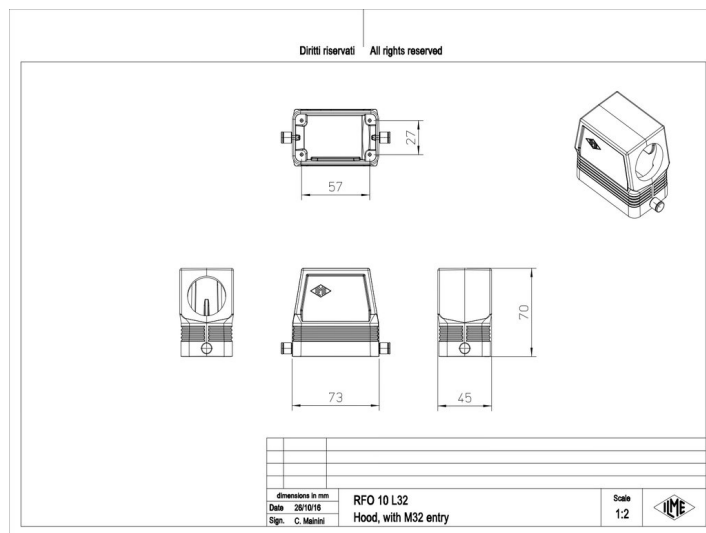

## Specificaties

### General characteristics

|                             |                                |
|-----------------------------|--------------------------------|
| Enclosure type              | Hood                           |
| Size                        | 57.27                          |
| Enclosure series            | HNM - High Number of Matings   |
| Closing type                | With 2 pegs                    |
| Locking mechanism           | Single locking lever           |
| Protection degree           | IP65 / IP66 / IP69             |
| Ambient lower temperature   | -40 °C                         |
| Ambient upper temperature   | 125 °C                         |
| Operation lower temperature | -40 °C                         |
| Operation upper temperature | 125 °C                         |
| Cable entry type            | side cable entry               |
| Cable entry size            | M32                            |
| Position cable feed         | Side entry                     |
| Height                      | 70 mm                          |
| Width                       | 43 mm                          |
| Length                      | 73 mm                          |
| Remark                      | 10.000 mating with HNM inserts |

# Product data sheet

## Ilme connectoren

hood, high, size 57.27, HNM alu, 2 pegs, 1xM32 side, no adaptor



### Remark 2

enclosures without adaptors, threaded by the body, to be used only with a complete gable gland

## Material

|                                                            |                                                   |
|------------------------------------------------------------|---------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                          |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating |
| Inflammability class of insulation material acc. with UL94 | V2                                                |