

# Product data sheet


## Ilme connectoren

bulkhead mounting housing, angled, size 21.21, HNM alu, 1 lever stainless steel, large cable gland



RKAX 03 IA4

<https://www.ac-solutions.be/nl/product/rkax03ia4>

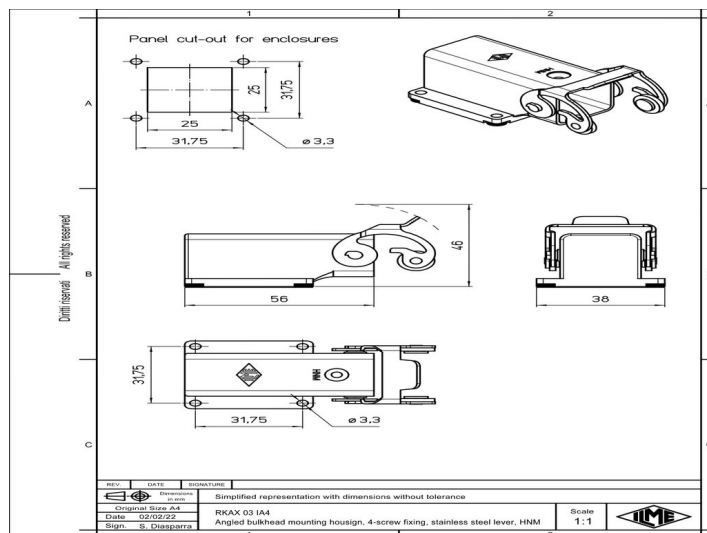

## Specificaties

### General characteristics

|                             |                                  |
|-----------------------------|----------------------------------|
| Enclosure type              | Angled bulkhead mounting housing |
| Size                        | 21.21                            |
| Enclosure series            | HNM - High Number of Matings     |
| Closing type                | With 1 lever                     |
| Locking mechanism           | Single locking lever             |
| Protection degree           | IP44   IP66 / IP67 / IP69        |
| Ambient lower temperature   | -40 °C                           |
| Ambient upper temperature   | 125 °C                           |
| Operation lower temperature | -40 °C                           |
| Operation upper temperature | 125 °C                           |
| Cable entry type            | without cable entry              |
| Position cable feed         | Without cable entry              |
| Height                      | 46 mm                            |
| Width                       | 31.75 mm                         |
| Length                      | 56 mm                            |

### Material

|                  |                          |
|------------------|--------------------------|
| Material housing | Die cast aluminium alloy |
|------------------|--------------------------|

# Product data sheet

## Ilme connectoren

bulkhead mounting housing, angled, size 21.21, HNM alu, 1 lever stainless steel, large cable gland



|                                                            |                                                   |
|------------------------------------------------------------|---------------------------------------------------|
| Coating housing                                            | With epoxy-polyester thermosetting powder coating |
| Inflammability class of insulation material acc. with UL94 | V2                                                |