

Product data sheet



Ilme connectoren

male contact, 16mm², gold HNM, crimp, 70A, series CX7, IPXXB, for CX 02 7M, for highly flex. cond.



RX7M2D 16XFP

<https://www.ac-solutions.be/nl/product/rx7m2d16xfp>

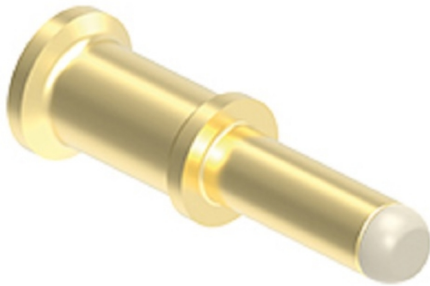

section (mm ²)	ø A (mm)	B (mm)	stripping length (mm)
6	3,5	36,6	15
10	4,3	35,8	15
16	5,5	35,8	15
16 (XF)	6,1	35,8	15
25	7,0	35,8	15

Specificaties

General characteristics

Connection type	Turned crimp
Contact type (gender)	Male
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Min. Cross section	16 mm ²
Max. Cross section	16 mm ²
AWG size	6 - 5
Diameter male contact	6 mm
Wire strip length	15 mm

Electrical parameters

Max. rated current	70 A
--------------------	------

Material

Material contact	Copper alloy
Plating of contact	Gold