

Product data sheet

Higo connectoren - S526A


Female panel mount connector



Self-locking

S526AM C 03 B9 0300

<https://www.ac-solutions.be/nl/product/s526amc03b90300>

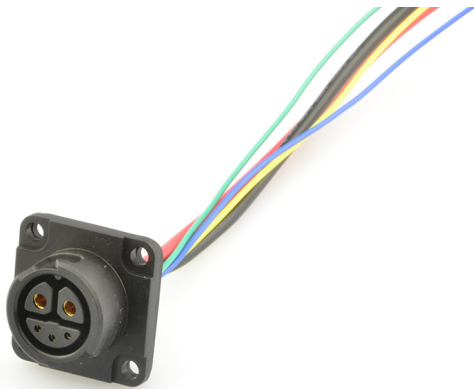

Specificaties

General Characteristics

Number of contacts	5 (2+3)
Connector shape	Panel mount
Gender	Female
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Locking	Self-locking
Mating cycles (times)	3000 Times
Connector diameter	26,0 x 26,0 mm
Cable Length	300 mm
Wire section	2 x 2,0 + 3 x 0,2
Terminal type	NA
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - S526A

Female panel mount connector



Electrical Parameters

Rated current	25 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Insulation wire	PVC
Material of contact	Phosphor Bronze
Contact plating	Gold plated