

Product data sheet

Higo connectoren - S824A



Female panel mount connector, self-locking



Self-locking, button release

S824AM C 03 FQ 0300

<https://www.ac-solutions.be/nl/product/s824amc03fq0300>

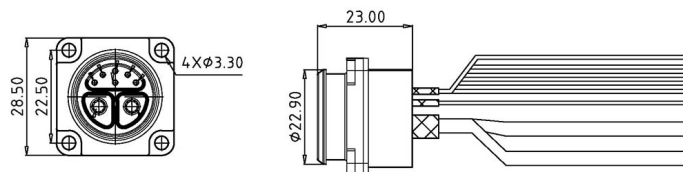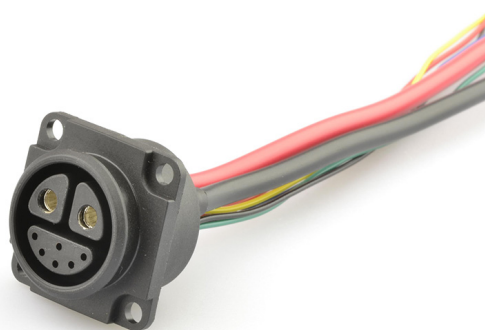

Specificaties

General Characteristics

Number of contacts	8 (2+6)
Connector shape	Panel mount
Gender	Female
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Mating cycles (times)	3000 Times
Connector diameter	22.9 mm
Cable Length	300 mm
Wire section	2 x 10,0 + 6 x 0,20
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - S824A

Female panel mount connector, self-locking



Electrical Parameters

Rated current	70 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Insulation wire	PVC
Material of contact	Brass
Contact plating	Gold over Nickel