

Product data sheet

Higo connectoren - S828B


Female panel mount connector



Charging & discharging in 1

S828BM C 03 GM 0300

<https://www.ac-solutions.be/nl/product/s828bmc03gm0300>

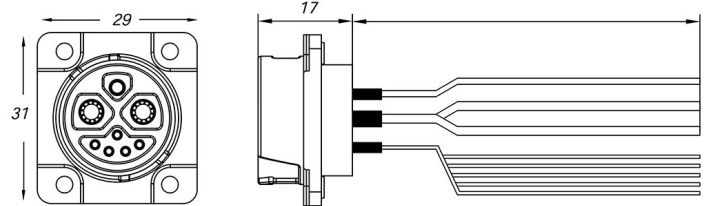

Specificaties

General Characteristics

Connector shape	Panel mount
Gender	Female
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Mating cycles (times)	3000 Times
Connector diameter	29,0 x 31,0 mm
Cable Length	300 mm
Wire section	2 x 4,0 + 1 x 0,82 + 5 x 0,2
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - S828B

Female panel mount connector



Electrical Parameters

Rated current	50 / 12 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Insulation wire	PVC
Material of contact	8 (2+1+5) Phosphor Bronze
Contact plating	Silver plated