

# Product data sheet


## Ilme connectoren

hood, high, size 104.27, T-TYPE /C plastic, 2 levers, 1xM40 top



TAVC 24 G40

<https://www.ac-solutions.be/nl/product/tavc24g40>

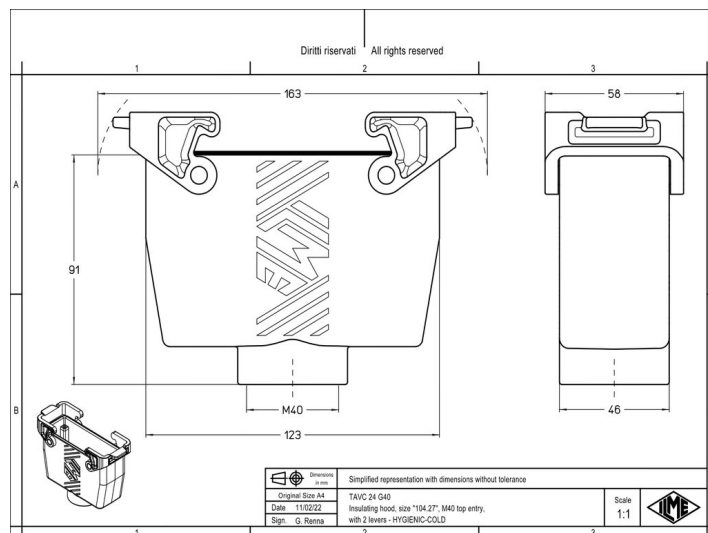

## Specificaties

### General characteristics

|                             |                       |
|-----------------------------|-----------------------|
| Enclosure type              | Hood                  |
| Size                        | 104.27                |
| Enclosure series            | T-TYPE /C             |
| Closing type                | With 2 levers         |
| Locking mechanism           | Double locking levers |
| Protection degree           | IP66 / IP69           |
| Ambient lower temperature   | -50 °C                |
| Ambient upper temperature   | 70 °C                 |
| Operation lower temperature | -50 °C                |
| Operation upper temperature | 70 °C                 |
| Cable entry type            | top cable entry       |
| Cable entry size            | M40                   |
| Position cable feed         | Top entry             |
| Height                      | 91 mm                 |
| Width                       | 46 mm                 |
| Length                      | 123 mm                |

## Material

# Product data sheet

## Ilme connectoren

hood, high, size 104.27, T-TYPE /C plastic, 2 levers, 1xM40 top



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Thermoplastic                                             |
| Coating housing                                            | Uncoated                                                  |
| Inflammability class of insulation material acc. with UL94 | V0                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |