

# Product data sheet


## Ilme connectoren

hood, high, size 44.27, T-TYPE /H plastic, 1 lever, 1xM25 top



TAVH 06 LG25

<https://www.ac-solutions.be/nl/product/tavh06lg25>

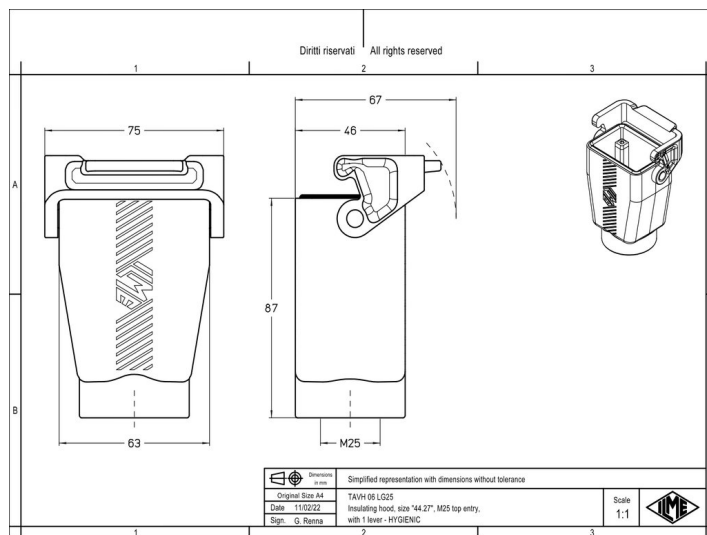

## Specificaties

### General characteristics

|                             |                      |
|-----------------------------|----------------------|
| Enclosure type              | Hood                 |
| Size                        | 44.27                |
| Enclosure series            | T-TYPE /H            |
| Closing type                | With 1 lever         |
| Locking mechanism           | Single locking lever |
| Protection degree           | IP66 / IP69          |
| Ambient lower temperature   | -40 °C               |
| Ambient upper temperature   | 70 °C                |
| Operation lower temperature | -40 °C               |
| Operation upper temperature | 70 °C                |
| Cable entry type            | top cable entry      |
| Cable entry size            | M25                  |
| Position cable feed         | Top entry            |
| Height                      | 87 mm                |
| Width                       | 46 mm                |
| Length                      | 63 mm                |

## Material

# Product data sheet

## Ilme connectoren

hood, high, size 44.27, T-TYPE /H plastic, 1 lever, 1xM25 top



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Thermoplastic                                             |
| Coating housing                                            | Uncoated                                                  |
| Inflammability class of insulation material acc. with UL94 | V0                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |