

Product data sheet

Techno connectoren


Mini plug connector



IP66/IP68

THB.384.A2A

<https://www.ac-solutions.be/nl/product/thb384a2a>

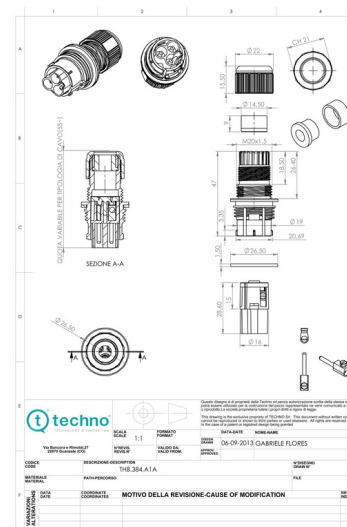

Specificaties

General Characteristics

Series	TEEPLUG
Subseries	TH384
Number of contacts	2
Gender	Male
Contact terminals	Contact screw terminals. For cable section 1.0 mm ²
Cable section	max 4,0
Min-max cable diameter	7,0 - 12,0 mm
Protection degree	IP66/IP68
Protection degree details	5 bar (50 m / 24 h)
Lower temperature	-40 °C
Upper temperature	+125 °C
Pollution degree	2
Note	Every connector housing type can be equipped with male or female contacts. For reasons pertaining to safety, only female contacts may be used in the live part of the connector.
Max. temperature	T85

Product data sheet

Techno connectoren

Mini plug connector



Standards	EN60998-1:2004 EN61984:2001 EN60529:1991+A1:2000 (IP6X - X8, 5 m / 3 h) EN60529:1991 (IPX8, 50 m / 24 h)
Tracking index	PTI 175

Electrical parameters

Rated current	17.5 A
Rated voltage	400 V
Impulse withstand voltage	4 kV

Material

Impulse withstand category	II
Lock nuts	PA66 GF UL94 V0 GWT 960°C black - grey RAL 7035
Connector housing	PA66 UL94 V0/V2 GWT 850°C black - grey RAL 7035
Terminal block housing	PA66 GF UL94 V0 GWT 960°C black - grey RAL 7035
Grommets	TPE
Seals	SEBS
Contact screw terminals	Brass nickel plated OR Brass silver plated (THX.384.XXX.AG)
Standard/Piercing screws	M3 steel zinc plated