

Product data sheet

Techno connectoren

Joint connector, screw with wire protection





IP68

cable Ø 8,0-17,0 mm

THB.400.D3A

<https://www.ac-solutions.be/nl/product/thb400d3a>

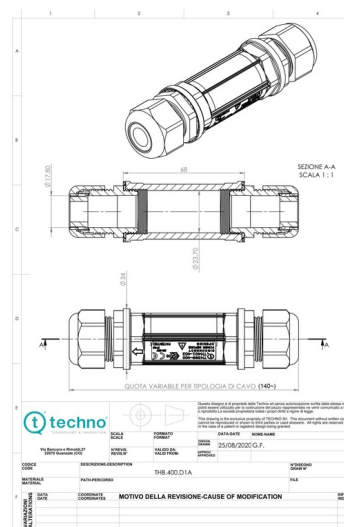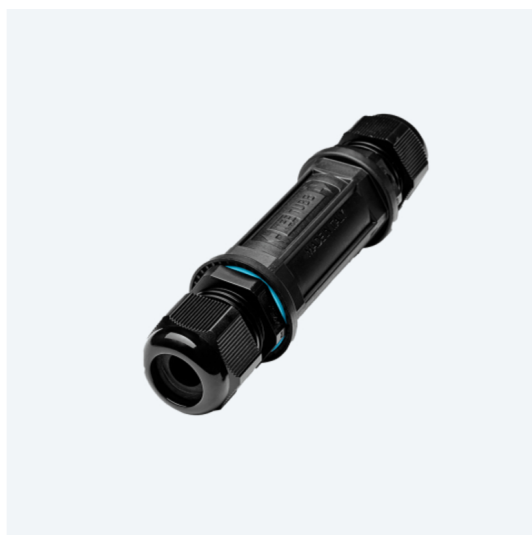

Specificaties

General Characteristics

Series	TEETUBE
Subseries	TH400
Number of contacts	5
Product shape	I
Contact terminals	Screw
Cable section	0,25 - 2,5 mm ²
Min-max cable diameter	8,0 - 17,0 mm
Cable entries/exits	2 ways
Protection degree	IP68
Protection degree details	IP68 (50m/1h)
Max. temperature	T125
Standards	EN60529:1991+A1:2000 EN60998-1:2004 EN60998-2-1:2004
Tracking index	PTI 250

Electrical parameters

Product data sheet

Techno connectoren

Joint connector, screw with wire protection



Rated current	24 A
Rated voltage	450 V

Material

Body	PA66GF UL94 V0
Connector housing	PA66 GF UL94 V0
Cable glands	POLYAMIDE PA6 V-2
Grommets	TPE
Contact screw terminals	Brass
Standard/Piercing screws	Steel