

Product data sheet

Techno connectoren

Junction connector T, Screw with wire protection




IP68

cabl e Ø 7,0-13,5mm

THB.402.C3A

<https://www.ac-solutions.be/nl/product/thb402c3a>

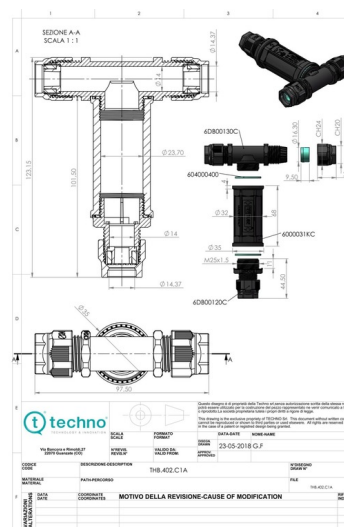

Specificaties

General Characteristics

Series	TEETUBE
Subseries	TH402
Number of contacts	3
Product shape	T
Contact terminals	Screw
Cable section	0,25 - 1,5 mm ²
Min-max cable diameter	7,0 - 13,5 mm
Cable entries/exits	3 ways
Protection degree	IP68
Protection degree details	IP68 (20m/1h)
Max. temperature	T125
Standards	EN60529:1991+A1:2000 EN60998-1:2004 EN60998-2-1:2004
Tracking index	PTI 250

Electrical parameters

Product data sheet

Techno connectoren

Junction connector T, Screw with wire protection



Rated current	24 A
Rated voltage	450 V

Material

Body	PA66GF UL94 V0
Connector housing	PA66 GF UL94 V0
Cable glands	PA66 UL94 V2
Grommets	TPE
Contact screw terminals	Brass
Standard/Piercing screws	Steel