

Product data sheet

Techno connectoren
16 A current distributor




IP66/ IP68

4 ways

THH.623.L3A

<https://www.ac-solutions.be/nl/product/thh623l3a>

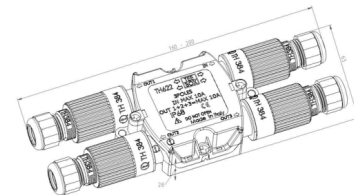

Specificaties

General Characteristics

Series	TEEBOX CURRENT DISTRIBUTORS
Subseries	TH623
Number of contacts	3
Plug-socket	3 output: PLUG THB.384 1 input: SOCKET THB.384
Contact terminals	Contact screw terminals for cable section 1,0 mm ²
Min-max cable diameter	7,0 - 12,0 mm
Cable entries/exits	4 ways
Protection degree	IP66/IP68
Lower temperature	-40 °C
Upper temperature	+125 °C
Pollution degree	2
Max. temperature	T85
Standards	EN61984:2001 EN60529:1991+A1:2000 TEST REPORT EN60998-1:2004 HEATING RESISTANCE

Product data sheet

Techno connectoren

16 A current distributor



Tracking index	PTI 175
----------------	---------

Electrical parameters

Rated current	17.5 A
Rated voltage	400 V
Impulse withstand voltage	4 kV

Material

Impulse withstand category	II
Distributor and connector housing	PA66 UL94 V0/V2 GWT 850°C black - grey RAL7035
Grommets	TPE/SEBS
Seals	TPE/SEBS
Fixing screws of lid	M3 x 12,0 mm inox stainless steel self-locking screw