

Product data sheet

Techno connectoren

Current distributor Plug & Socket screw




IP66/IP68

Push pull locking

THH.625.A3A

<https://www.ac-solutions.be/nl/product/thh625a3a>

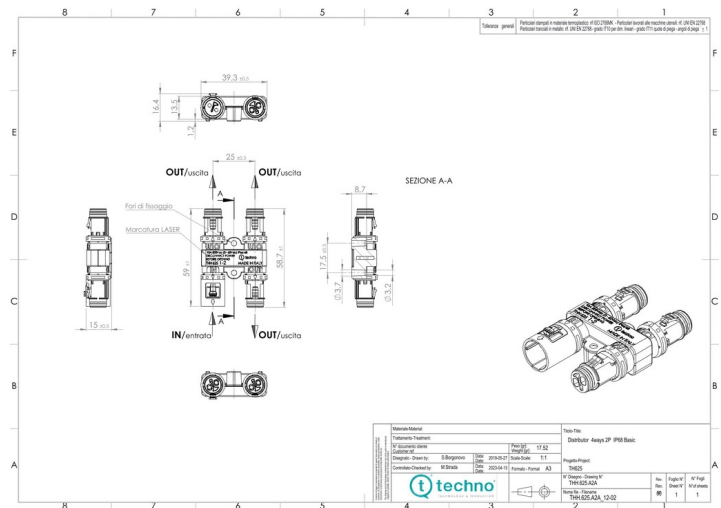

Specificaties

General Characteristics

Series	TEEBOX CURRENT DISTRIBUTORS
Subseries	TH625
Number of contacts	3
Contact terminals	Screw
Cable entries/exits	4 ways
Protection degree	IP66/IP68
Lower temperature	-40 °C
Upper temperature	+100 °C
Pollution degree	2
Note	Plug and socket connectors are not included, To be ordered separately
Standards	EN 61984:2009
Tracking index	PTI 175

Electrical parameters

Product data sheet

Techno connectoren

Current distributor Plug & Socket screw



Rated current	10 A
Rated voltage	500 V

Material

Impulse withstand category	II
Distributor and connector housing	PA66 GF UL94 V0
Seals	TPE