

# Product data sheet


## Ilme connectoren

bulkhead mounting housing, size 104.27, T-TYPE /H plastic, 2 levers



THIH 24

<https://www.ac-solutions.be/nl/product/thih24>

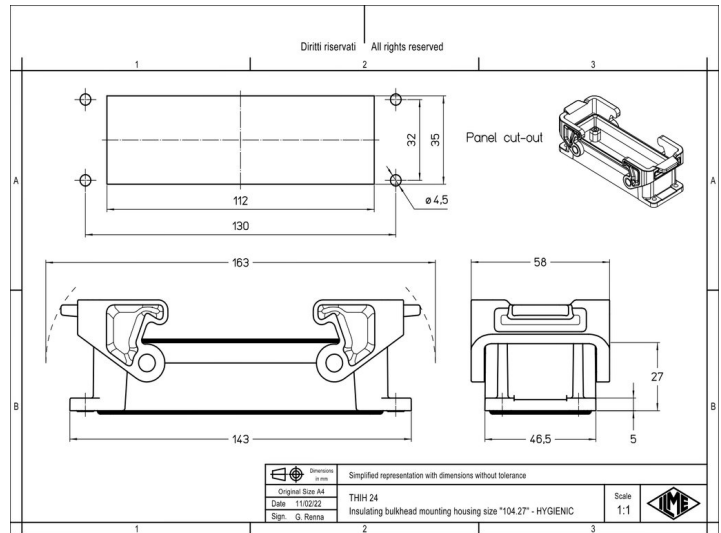

## Specificaties

### General characteristics

|                             |                           |
|-----------------------------|---------------------------|
| Enclosure type              | Bulkhead mounting housing |
| Size                        | 104.27                    |
| Enclosure series            | T-TYPE /H                 |
| Closing type                | With 2 levers             |
| Locking mechanism           | Double locking levers     |
| Protection degree           | IP66 / IP69               |
| Ambient lower temperature   | -40 °C                    |
| Ambient upper temperature   | 70 °C                     |
| Operation lower temperature | -40 °C                    |
| Operation upper temperature | 70 °C                     |
| Cable entry type            | without cable entry       |
| Position cable feed         | Without cable entry       |
| Height                      | 27 mm                     |
| Width                       | 46.5 mm                   |
| Length                      | 143 mm                    |

### Material

|                  |               |
|------------------|---------------|
| Material housing | Thermoplastic |
|------------------|---------------|

# Product data sheet

## Ilme connectoren

bulkhead mounting housing, size 104.27, T-TYPE /H plastic, 2 levers



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Coating housing                                            | Uncoated                                                  |
| Inflammability class of insulation material acc. with UL94 | V0                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |