

Product data sheet

Higo connectoren - Z1228B


Female cable connector



Charging & discharging in 1

Z1228BM P 00 GK 1000

<https://www.ac-solutions.be/nl/product/z1228bmp00gk1000>

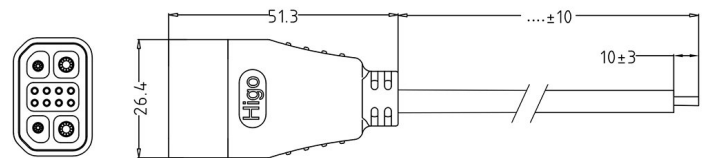

Specificaties

General Characteristics

Number of contacts	12 (2+2+8)
Connector shape	Plug
Gender	Female
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Mating cycles (times)	3000 Times
Connector diameter	26,4 mm
Fitting length	90.8 mm
Cable Length	1000 mm
Cable diameter	8.5 mm
Wire section	2 x 2,5 + 2 x 1,0 + 8 x 0,2
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - Z1228B

Female cable connector



Electrical Parameters

Rated current	25 / 10 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Material jacket	PVC
Insulation wire	PVC
Material of contact	Phosphor Bronze
Contact plating	Gold over Nickel