

Product data sheet

Higo connectoren - Micro A


Micro A male plug connector



Push-on (no locking)

Z205AG P 00 DS 3000

<https://www.ac-solutions.be/nl/product/z205agp00ds3000>

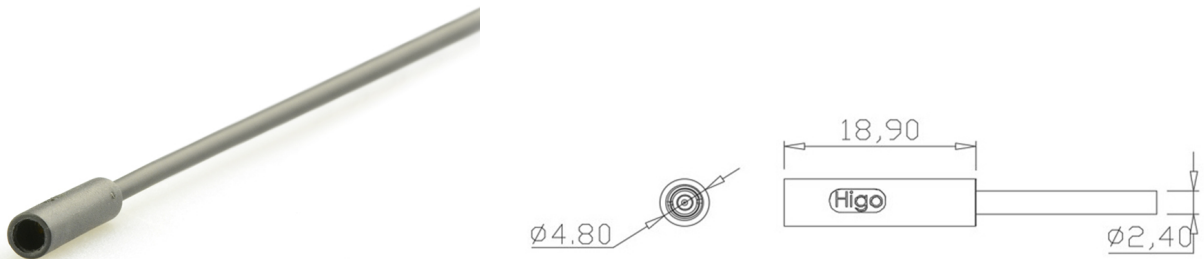

Specificaties

General Characteristics

Number of contacts	2
Connector shape	Plug
Gender	Male
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Locking	Push-on (no locking)
Mating cycles (times)	200 Times
Connector diameter	4,8 mm
Fitting length	35,4 mm
Cable Length	3000 mm
Cable diameter	2,4 mm
Wire section	2 x 0,14 mm ²
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - Micro A

Micro A male plug connector



Electrical Parameters

Rated current	2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Material jacket	PVC
Insulation wire	FEP
Material of contact	Copper Alloy
Contact plating	Gold over Nickel