

Product data sheet


Higo connectoren - Z311A

Female panel mount connector, no locking (push-on)



Z311AM C 03 FK 0300

<https://www.ac-solutions.be/nl/product/z311amc03fk0300>

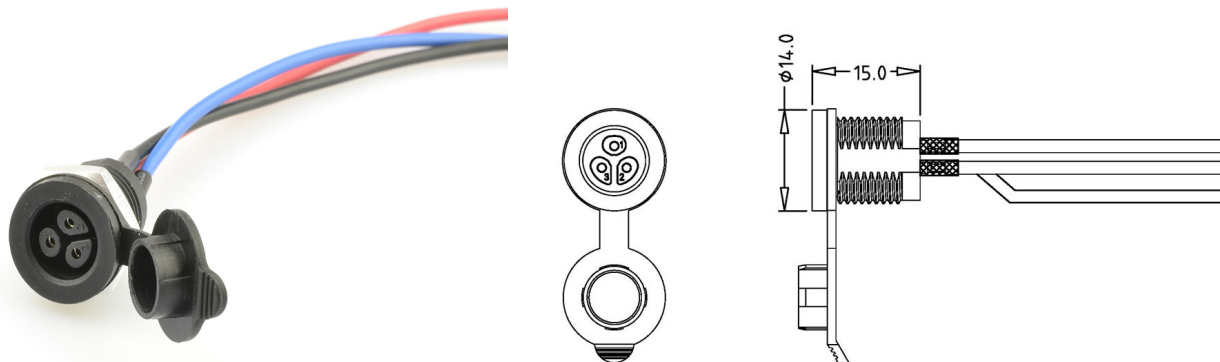

Specificaties

General Characteristics

Number of contacts	3
Connector shape	Panel mount
Gender	Female
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP66
Mating cycles (times)	3000 Times
Connector diameter	14,0 mm
Cable Length	300 mm
Wire section	3 x 0,5 mm ²
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - Z311A

Female panel mount connector, no locking (push-on)



Electrical Parameters

Rated current	5 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Material jacket	PVC
Insulation wire	PVC
Material of contact	Phosphor Bronze
Contact plating	Gold over Nickel