

Product data sheet

Higo connectoren - Z624C



Battery male panel mount connector 36V code, no locking (push-on)



Only for use in 36V applications

Z624CG C 03 D1 0150

<https://www.ac-solutions.be/nl/product/z624cgc03d10150>

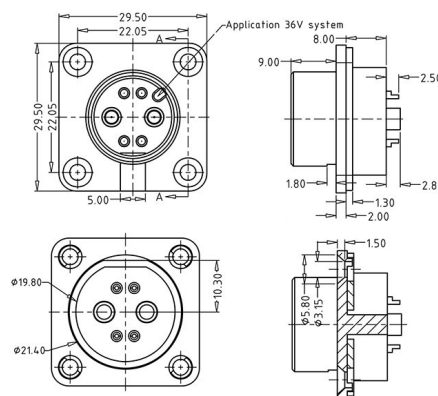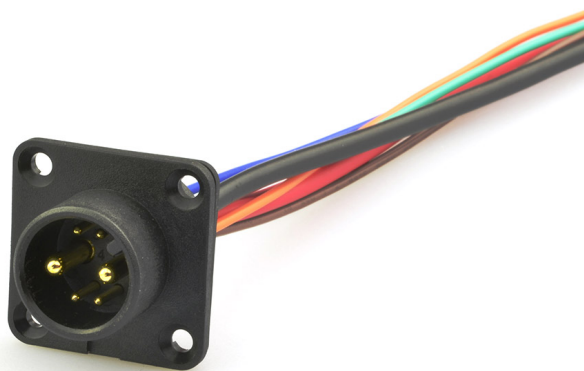

Specificaties

General Characteristics

Number of contacts	6 (2+4)
Connector shape	Panel mount
Gender	Male
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Locking	Push-on (no locking)
Mating cycles (times)	3000 Times
Connector diameter	29,5 mm
Cable Length	Single wires 150
Wire section in AWG	2 x 14 + 4 x 22
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - Z624C

Battery male panel mount connector 36V code, no locking (push-on)



Electrical Parameters

Rated current	45 / 5 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Insulation wire	PVC
Material of contact	Brass
Contact plating	Gold over Nickel