

Product data sheet


Higo connectoren - Z707D

Male cable connector



Z707DG P 00 E9 1000

<https://www.ac-solutions.be/nl/product/z707dgp00e91000>

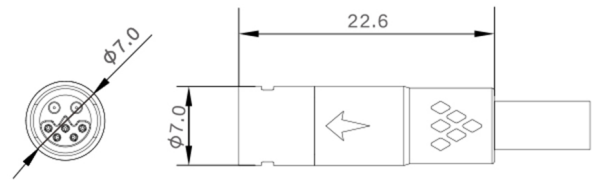

Specificaties

General Characteristics

Number of contacts	7 (2+5)
Connector shape	Plug
Gender	Male
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Locking	Push-on (no locking)
Mating cycles (times)	200 Times
Fitting length	40 mm
Cable Length	1000 mm
Terminal type	NA

Product data sheet

Higo connectoren - Z707D

Male cable connector



Electrical Parameters

Rated current	5 / 2 A
Rated voltage	48V AC/DC
Withstanding voltage	500 V
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Material jacket	TPU
Insulation wire	FEP
Contact plating	Gold