



inserts:	page:
CD ..... 80 poles + ⊕	60
CDD ..... 144 poles + ⊕	73
CDS ..... 54 poles + ⊕	82
CSH ..... 32 poles + ⊕	95
CNE, CSE ..... 32 poles + ⊕	108
CCE ..... 32 poles + ⊕	114
CSS ..... 32 poles + ⊕	126
CTSE (16A) *) ..... 32 poles + ⊕	134
CQE ..... 64 poles + ⊕	142
CMCE ..... 12+4 (aux) poles + ⊕	154
CME ..... 12+4 (aux) poles + ⊕	155
CMSH ..... 12+4 (aux) poles + ⊕	155
CP ..... 12 poles + ⊕	163
MIXO ..... 4 + 4 modules	179-215

\*) can be used only in bulkhead mounting housings

insert centre distance:  
2 x (77,5 x 27) mm

bulkhead mounting housings with 2 levers or 4 pegs




bulkhead mounting housings with single lever



description	part No.	part No.
with one or two levers	CHI 32	CHI 32 L
with pegs and cover <sup>1)</sup>	CHI 32 CS	
with lever and cover		CHI 32 LS

<sup>1)</sup> may be combined with enclosures:  
- CHO/CHV/CFO/CFV 32 X  
- MHO/MHV/MFO/MFV 32 X


panel cut-out for bulkhead mounting housings in mm

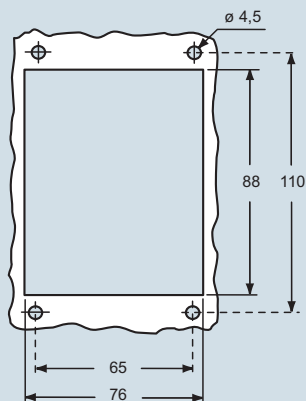


**NB:**  
The enclosures ensure IP66 protection (or IP65 for hinged cover versions) rating when mated and locked with the closing levers.  
The cover (CS) only ensures mechanical protection, but does not ensure IP65 protection rating.

dimensions in mm

CHI

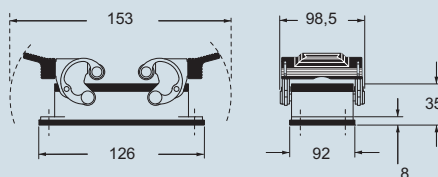


CHI CS

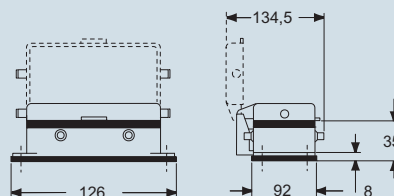


dimensions in mm

CHI L

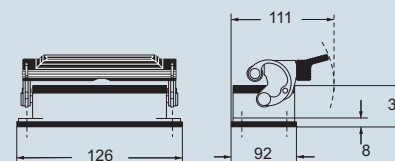

CHI LS

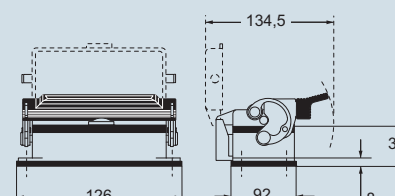

**CAIUS** Type 4/4X/12



dimensions shown are not binding and may be changed without notice


C-TYPE - size 77.62



inserts:	page:
CD ..... 80 poles + ⊕	60
CDD ..... 144 poles + ⊕	73
CDS ..... 54 poles + ⊕	82
CSH ..... 32 poles + ⊕	95
CNE, CSE ..... 32 poles + ⊕	108
CCE ..... 32 poles + ⊕	114
CSS ..... 32 poles + ⊕	126
CQE ..... 64 poles + ⊕	142
CMCE ..... 12+4 (aux) poles + ⊕	154
CME ..... 12+4 (aux) poles + ⊕	155
CMSH ..... 12+4 (aux) poles + ⊕	155
CP ..... 12 poles + ⊕	163
MIXO ..... 4 + 4 modules	179-215

insert centre distance:  
2 x (77,5 x 27) mm

surface mounting housing with 2 levers



surface mounting housings with single lever




description	part No.		part No.		part No.		part No.	
	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M
with one or two levers	29	40	29	40	29	40	29	40
with one or two levers	29 x 2	40 x 2	29 x 2	40 x 2	29 x 2	40 x 2	29 x 2	40 x 2
with one or two levers	36	50	36	50	36	50	36	50
with one or two levers	36 x 2	50 x 2	36 x 2	50 x 2	36 x 2	50 x 2	36 x 2	50 x 2
with one or two levers	42		42		42		42	
with one or two levers	42 x 2		42 x 2		42 x 2		42 x 2	
with lever and cover					29	40	29	40
with lever and cover					29 x 2	40 x 2	29 x 2	40 x 2
with lever and cover					36	50	36	50
with lever and cover					36 x 2	50 x 2	36 x 2	50 x 2
with lever and cover					42		42	
with lever and cover					42 x 2		42 x 2	

**NB:**  
The enclosures ensure IP66 protection (or IP65 for hinged cover versions) rating when mated and locked with the closing levers.  
The cover (CS) only ensures mechanical protection, but does not ensure IP65 protection rating.


dimensions in mm

CHP and MHP

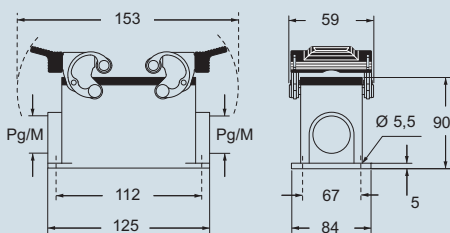


dimensions in mm

CHP L and MHP L

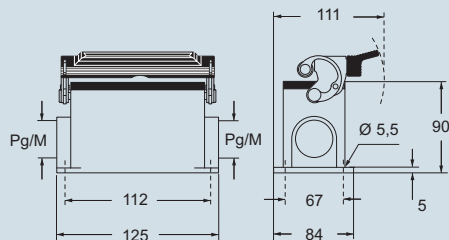

CHP LS and MHP LS

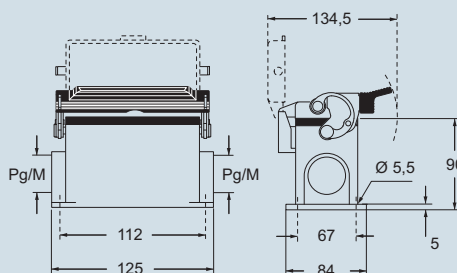

**CAUS** Type 4/4X/12



dimensions shown are not binding and may be changed without notice

C-TYPE - size 77.62



inserts:	page:
CD ..... 80 poles + ⊕	60
CDD ..... 144 poles + ⊕	73
CDS ..... 54 poles + ⊕	82
CSH ..... 32 poles + ⊕	95
CNE, CSE ..... 32 poles + ⊕	108
CCE ..... 32 poles + ⊕	114
CSS ..... 32 poles + ⊕	126
CQE ..... 64 poles + ⊕	142
CMCE ..... 12+4 (aux) poles + ⊕	154
CME ..... 12+4 (aux) poles + ⊕	155
CMSH ..... 12+4 (aux) poles + ⊕	155
CP ..... 12 poles + ⊕	163
MIXO ..... 4 + 4 modules	179-215

insert centre distance:  
2 x (77,5 x 27) mm

hoods with 4 pegs and 2 levers



hoods with 2 pegs and 1 lever




description	part No.		part No.		part No.		part No.	
		entry Pg		entry M		entry Pg		entry M
with pegs, side entry	CHO 32.29	29	MHO 32.32	32	CHO 32 L	36	MHO 32 L40	40
with pegs, side entry	CHO 32	36	MHO 32.40	40				
with pegs, side entry	CHO 32.42	42	MHO 32.50	50				
with pegs, side entry, without adaptor *	CFO 32.29	29	MFO 32.32	32	CFO 32 L	36	MFO 32 L40	40
with pegs, side entry, without adaptor *	CFO 32	36	MFO 32.40	40				
with pegs, side entry, without adaptor *	CFO 32.42	42	MFO 32.50	50				
with pegs, top entry	CHV 32.29	29	MHV 32.32	32	CHV 32 L	36	MHV 32 L40	40
with pegs, top entry	CHV 32	36	MHV 32.40	40				
with pegs, top entry	CHV 32.42	42	MHV 32.50	50				
with pegs, top entry, without adaptor *	CFV 32.29	29	MFV 32.32	32	CFV 32 L	36	MFV 32 L40	40
with pegs, top entry, without adaptor *	CFV 32	36	MFV 32.40	40				
with pegs, top entry, without adaptor *	CFV 32.42	42	MFV 32.50	50				
with levers and gasket, top entry	CHV 32 G29	29	MHV 32 G32	32	CHV 32 LG	36	MHV 32 LG40	40
with one or two levers and gasket, top entry	CHV 32 G	36	MHV 32 G40	40				
with levers and gasket, top entry	CHV 32 G42	42	MHV 32 G50	50				
with levers and gasket, top entry, without adaptor *	CFV 32 G29	29	MFV 32 G32	32	CFV 32 LG	36	MFV 32 LG40	40
with lever/s and gasket, top entry, without adaptor *	CFV 32 G	36	MFV 32 G40	40				
with levers and gasket, top entry, without adaptor *	CFV 32 G42	42	MFV 32 G50	50				


\* enclosure without adaptor, threaded on the body, to be used only with a complete cable gland.

dimensions in mm


CHO/CFO and MHO/MFO



CHV/CFV and MHV/MFV

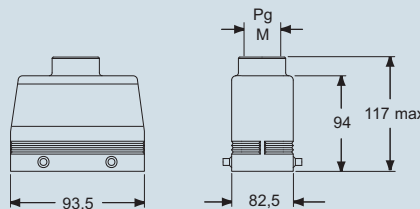


CHV/CFV G and MHV/MFV G

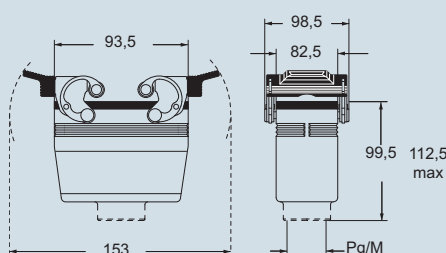


dimensions in mm


CHO/CFO L and MHO/MFO L

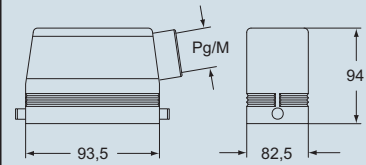

CHV/CFV L and MHV/MFV L

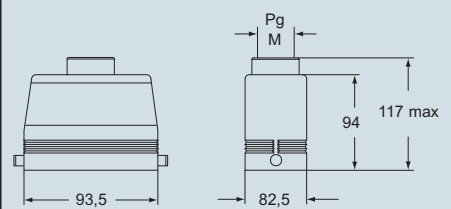

CHV/CFV LG and MHV/MFV LG

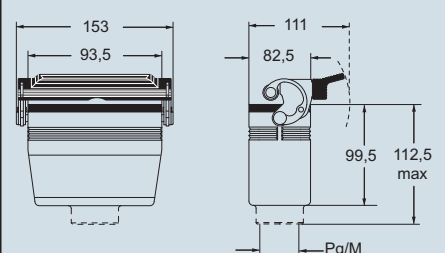

Type 4/4X/12



dimensions shown are not binding and may be changed without notice

C-TYPE - size 77.62




inserts:	page:
CD ..... 80 poles + ⊕	60
CDD ..... 144 poles + ⊕	73
CDS ..... 54 poles + ⊕	82
CSH ..... 32 poles + ⊕	95
CNE, CSE ..... 32 poles + ⊕	108
CCE ..... 32 poles + ⊕	114
CSS ..... 32 poles + ⊕	126
CQE ..... 64 poles + ⊕	142
CMCE ..... 12+4 (aux) poles + ⊕	154
CME ..... 12+4 (aux) poles + ⊕	155
CMSH ..... 12+4 (aux) poles + ⊕	155
CP ..... 12 poles + ⊕	163
MIXO ..... 4 + 4 modules	179-215

insert centre distance:  
2 x (77,5 x 27) mm

hoods with 2 levers



covers

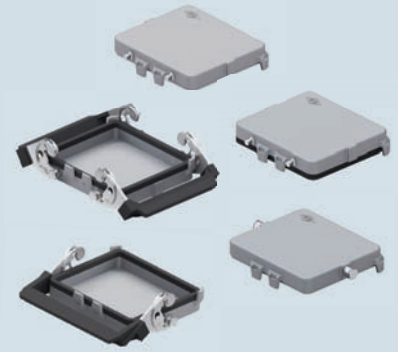

description	part No.	entry Pg	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with levers, side entry <sup>1)</sup>	<b>CHO 32 X</b>	36	<b>MHO 32 X40</b>	40		
with levers, side entry, without adaptor * <sup>1)</sup>	<b>CFO 32 X</b>	36	<b>MFO 32 X40</b>	40		
with levers, top entry <sup>1)</sup>	<b>CHV 32 X</b>	36	<b>MHV 32 X40</b>	40		
with levers, top entry, without adaptor * <sup>1)</sup>	<b>CFV 32 X</b>	36	<b>MFV 32 X40</b>	40		
with 4 pegs (for enclosures with 2 levers with gasket) with 4 pegs and gasket (for enclosures with 2 levers) <sup>2)</sup> with 2 pegs (for enclosures with 1 lever with gasket)					<b>CHC 32</b> <b>CHC 32 L</b>	<b>CHC 32 S</b> <b>CHC 32 C</b> <b>CHC 32 SL</b>
with 2 levers (for hoods with 4 pegs) with 1 lever (for hoods with 2 pegs)						<b>CHC 32 G</b> <b>CHC 32 LG</b>


\* enclosure without adaptor, threaded on the body, to be used only with a complete cable gland.

<sup>1)</sup> may be combined with CHI 32 CS enclosures


<sup>2)</sup> may be combined with enclosures:  
- CHO/CFO 32 X and CHV/CFV 32 X  
- MHO/MFO 32 X and MHV/MFV 32 X

dimensions in mm

CHO/CFO X and MHO/MFO X

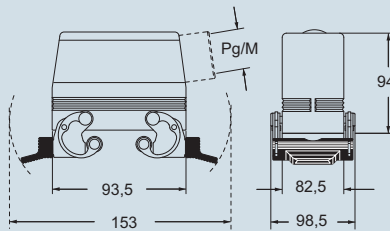


CHV/CFV X and MHV/MFV X

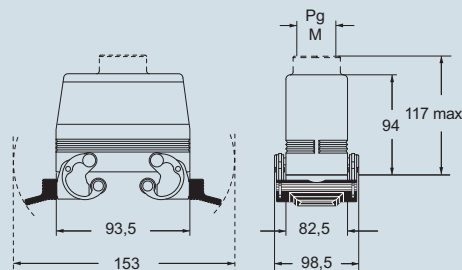


dimensions in mm


CHC (S)




CHC C





CHC L (SL)



CHC G

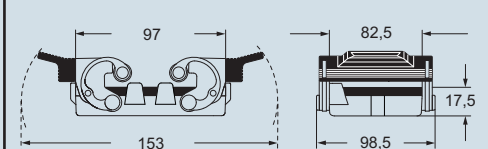

CHC LG

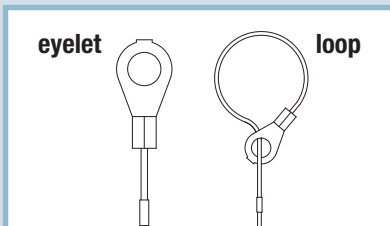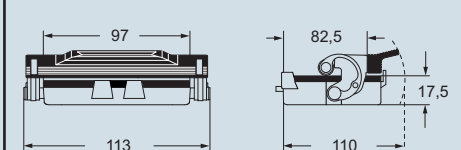

**CALUS** Type 4/4X/12



dimensions shown are not binding and may be changed without notice

C-TYPE - size 104.62