



inserts:		page:
CD	50 poles + ⊕	58
CDD	76 poles + ⊕	71
CSAH	32 poles + ⊕	89
CDA	32 poles + ⊕	102
CDC	32 poles + ⊕	103

insert dimensions:
2 x (66 x 16) mm

bulkhead mounting housings with 2 levers or 4 pegs




surface mounting housings with 2 levers or 4 pegs



description	part No.	part No.	entry Pg	part No.	entry M
with levers	CHI 50				
with levers and cover ¹⁾	CHI 50 CS				
with levers		CHP 50.21	21	MHP 50.32	32
with levers		CHP 50.221	21 x 2	MHP 50.232	32 x 2
with levers		CHP 50.29	29	MHP 50.40	40
with levers		CHP 50.229	29 x 2	MHP 50.240	40 x 2
with levers		CHP 50 CS	21	MHP 50 CS32	32
with levers		CHP 50 CS2	21 x 2	MHP 50 CS232	32 x 2
with levers		CHP 50 CS29	29	MHP 50 CS40	40
with levers		CHP 50 CS229	29 x 2	MHP 50 CS240	40 x 2


¹⁾ may be combined with enclosures:
- CHO/CAO 50 X and CAV 50 X
- MHO/MAO/MFO 50 X and MAV/MFV 50 X

panel cut-out for bulkhead mounting housings in mm

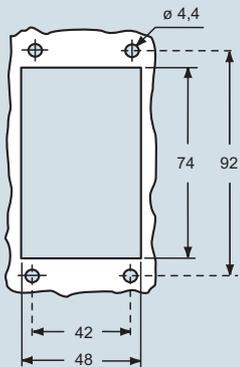


dimensions in mm

CHI

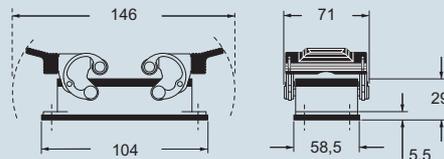


CHI CS

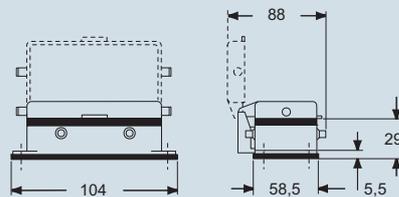


dimensions in mm

CHP and MHP

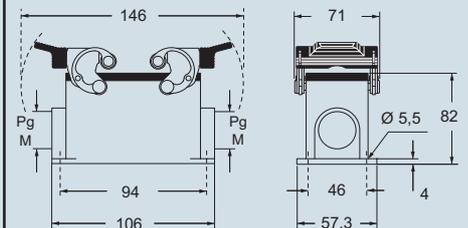

CHP CS and MHP CS

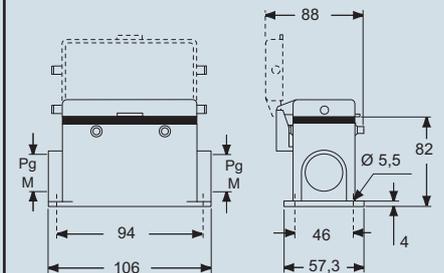

NB:
The enclosures ensure IP66 protection (or IP65 for hinged cover versions) rating when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice



inserts:	page:
CD 50 poles + ⊕	58
CDD 76 poles + ⊕	71
CSAH 32 poles + ⊕	89
CDA 32 poles + ⊕	102
CDC 32 poles + ⊕	103

insert dimensions:
2 x (66 x 16) mm

hoods with 4 pegs



hoods with 2 levers or 4 pegs




description	part No.		part No.		part No.		part No.	
		entry Pg		entry M		entry Pg		entry M
with pegs, side entry	CHO 50	21	MHO 50.25	25				
with pegs, side entry			MHO 50.32	32				
with pegs, side entry, high construction	CAO 50.21	21	MAO 50.25	25				
with pegs, side entry, high construction	CAO 50.29	29	MAO 50.32	32				
with pegs, top entry, high construction					CAV 50.21	21	MAV 50.25	25
with pegs, top entry, high construction					CAV 50.29	29	MAV 50.32	32
with levers and gasket, top entry, high construction					CAV 50 G29	29	MAV 50 G32	32
with pegs, side entry, high construction, without adaptor *	CFO 50.21	21	MFO 50.25	25				
with pegs, side entry, high construction, without adaptor *	CFO 50.29	29	MFO 50.32	32				
with pegs, top entry, high construction, without adaptor *					CFV 50.21	21	MFV 50.25	25
with pegs, top entry, high construction, without adaptor *					CFV 50.29	29	MFV 50.32	32
with levers and gasket, top entry, high, without adapter *					CFV 50 G29	29	MFV 50 G32	32

* enclosure without adaptor, threaded on the body, to be used only with a complete cable gland.


dimensions in mm

CHO (CAO/CFO) and MHO (MAO/MFO)

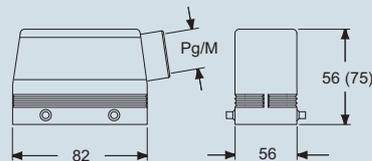


dimensions in mm

CAV (CFV) and MAV (MFV)

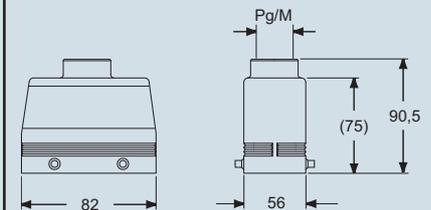

CAV G (CFV G) and MAV G (MFV G)

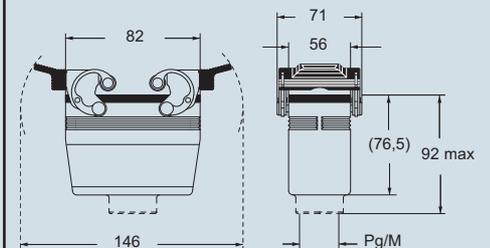

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice

C-TYPE - size 66.40



inserts:		page:
CD	50 poles + ⊕	58
CDD	76 poles + ⊕	71
CSAH	32 poles + ⊕	89
CDA	32 poles + ⊕	102
CDC	32 poles + ⊕	103

insert dimensions:
2 x (66 x 16) mm

CHC 50 and CHC 50 G covers cannot be used together with coding pins. If this application is required, please contact ILME SpA.

hoods with 2 levers



covers




description	part No.		entry		part No. (with eyelet)	part No. (with loop)
			Pg	M		
with levers, side entry ¹⁾	CHO 50 X	21	MHO 50 X25	25		
with levers, side entry ¹⁾						
with levers, side entry, high construction ¹⁾	CAO 50 X	21	MAO 50 X25	25		
with levers, side entry, high construction ¹⁾						
with levers, top entry, high construction ¹⁾	CAV 50 X	21	MAV 50 X25	25		
with levers, top entry, high construction ¹⁾						
with levers, side entry, high construction, without adaptor ^{1)*}	CFO 50 X	21	MFO 50 X25	25		
with levers, side entry, high construction, without adaptor ^{1)*}						
with levers, top entry, high construction, without adaptor ^{1)*}	CFV 50 X	21	MFV 50 X25	25		
with levers, top entry, high construction, without adaptor ^{1)*}						
with 4 pegs (for enclosures with 2 levers)					CHC 50	CHC 50 S
with 2 levers (for hoods with 4 pegs)						CHC 50 G

¹⁾ may be combined with enclosures:
- CHI 50 CS, CHP 50 CS and MHP 50 CS


* enclosure without adaptor, threaded on the body, to be used only with a complete cable gland.

dimensions in mm

CHO X (CAO X/CFO X) and MHO X (MAO X/MFO X)

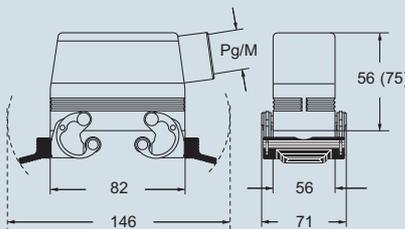

CAV X (CFV X) and MAV X (MFV X)


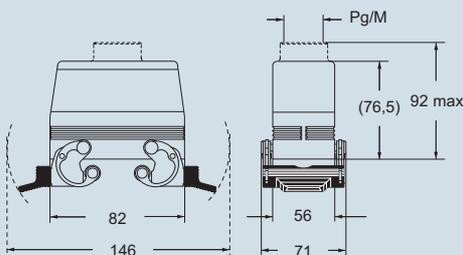


dimensions in mm

CHC(S)



CHC G

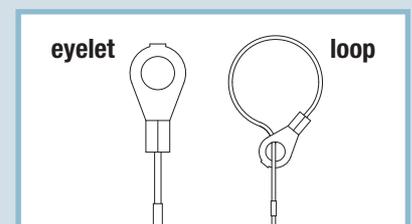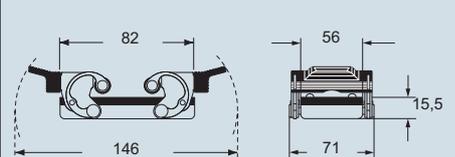

ILME® Type 4/4X/12



dimensions shown are not binding and may be changed without notice

C-TYPE - size 66.40