



inserts: page:
CME 6+2 (aux) poles + ⊕ 151

insert centre distance:
77,5 x 27 mm

bulkhead mounting housings with 2 levers




bulkhead mounting housings with single lever




| description | part No. | part No. |
|------------------------|---------------|------------------|
| with one or two levers | CMI 06 | CMI 06 L |
| with lever and cover | | CMI 06 LS |

panel cut-out for bulkhead mounting housings in mm

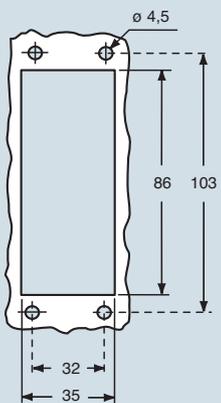


dimensions in mm

CMI

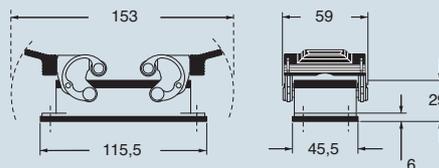


dimensions in mm

CMI L

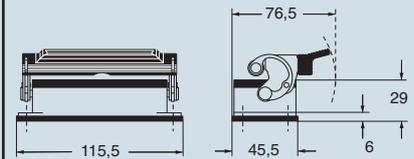

CMI LS

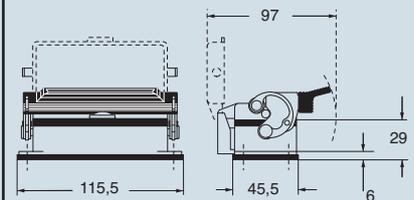

NB:
 The enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

CALUS® Type 4/4X/12



dimensions shown are not binding and may be changed without notice



inserts: page:
CME 6+2 (aux) poles + ⊕ 151

insert centre distance:
77,5 x 27 mm

surface mounting housings with 2 levers



surface mounting housings with single lever




| description | part No. | | part No. | | part No. | | part No. | |
|---|-----------------|---------|--------------------|---------|-------------------|---------|---------------------|---------|
| | entry Pg | entry M | entry Pg | entry M | entry Pg | entry M | entry Pg | entry M |
| with levers | CMP 06 | 21 | MMP 06.25 | 25 | CMP 06 L | 21 | MMP 06 L25 | 25 |
| with levers | CMP 06.2 | 21 x 2 | MMP 06.225 | 25 x 2 | CMP 06 L2 | 21 x 2 | MMP 06 L225 | 25 x 2 |
| with levers, high construction | | | MMAP 06.32 | 32 | | | MMAP 06 L32 | 32 |
| with levers, high construction | | | MMAP 06.232 | 32 x 2 | | | MMAP 06 L232 | 32 x 2 |
| with levers, high construction | | | MMAP 06.40 | 40 | | | MMAP 06 L40 | 40 |
| with levers, high construction | | | MMAP 06.240 | 40 x 2 | | | MMAP 06 L240 | 40 x 2 |
| with lever and cover | | | | | CMP 06 LS | 21 | MMP 06 LS25 | 25 |
| with lever and cover | | | | | CMP 06 LS2 | 21 x 2 | MMP 06 LS225 | 25 x 2 |
| with lever and cover, high construction | | | | | | | MMAP 06 LS32 | 32 |
| with lever and cover, high construction | | | | | | | MMAP 06LS232 | 32 x 2 |
| with lever and cover, high construction | | | | | | | MMAP 06 LS40 | 40 |
| with lever and cover, high construction | | | | | | | MMAP 06LS240 | 40 x 2 |

NB:
 The enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

dimensions in mm


CMP and MMP - MMAP

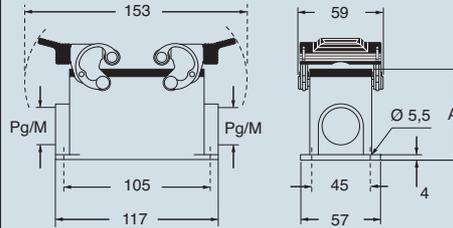


| type | A |
|------------------|----|
| CMP / MMP | 63 |
| MMAP | 81 |

dimensions in mm

CMP L and MMP L - MMAP L

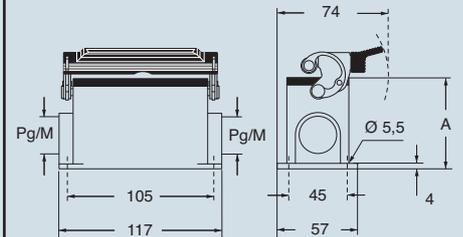

CMP LS and MMP LS - MMAP LS

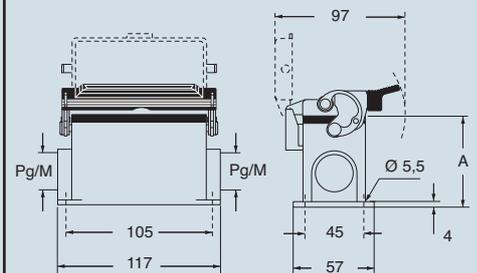

| type | A |
|------------------------|----|
| CMP L / MMP L | 63 |
| MMAP L | 81 |
| CMP LS / MMP LS | 63 |
| MMAP LS | 81 |

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice

830V - size 77.27



inserts: page:
CME 6+2 (aux) poles + ⊕ 151

insert centre distance:
77,5 x 27 mm

hoods with 4 pegs



hoods with 2 pegs




| description | hoods with 4 pegs | | hoods with 2 pegs | | | | | |
|--|-------------------|----------|--------------------|---------|-----------------|----|--------------------|----|
| | part No. | entry Pg | part No. | entry M | | | | |
| with pegs, side entry | CMO 06 | 21 | MMO 06.25 | 25 | CMO 06 L | 21 | MMO 06 L25 | 25 |
| with pegs, side entry | | | MMO 06.32 | 32 | | | MMO 06 L32 | 32 |
| with pegs, side entry, high construction | | | MMAO 06.32 | 32 | | | MMAO 06 L32 | 32 |
| with pegs, side entry, high construction | | | MMAO 06.40 | 40 | | | MMAO 06 L40 | 40 |
| with pegs, top entry | CMV 06 | 21 | MMV 06.25 * | 25 | CMV 06 L | 21 | MMV 06 L25 | 25 |
| with pegs, top entry | | | MMV 06.32 | 32 | | | MMV 06 L32 | 32 |
| with pegs, top entry, high construction | | | MMAV 06.32 | 32 | | | MMAV 06 L32 | 32 |
| with pegs, top entry, high construction | | | MMAV 06.40 | 40 | | | MMAV 06 L40 | 40 |

* can only be used with a complete cable gland (to be purchased separately)


dimensions in mm

CMO and MMO (MMAO)

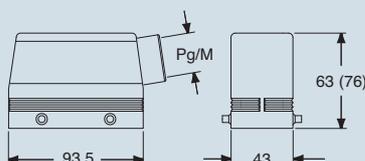


dimensions in mm


CMO L and MMO L (MMAO L)

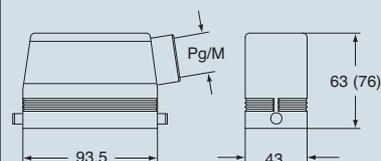

CMV and MMV (MMAV)

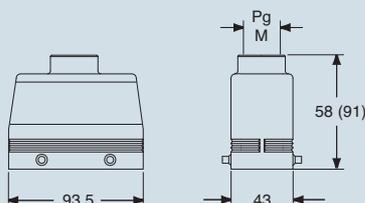

CMV L and MMV L (MMAV L)

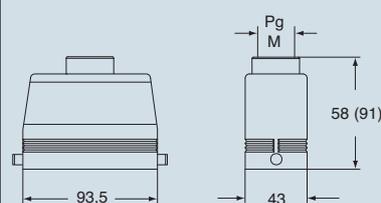

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice

830V - size 77.27



inserts: page:
CME 6+2 (aux) poles + ⊕ 151

insert centre distance:
77,5 x 27 mm

hoods with 2 levers




covers



| description | part No. | | part No. | | part No. (with eyelet) | | part No. (with loop) | |
|--|-----------------|----------|--------------------|---------|------------------------|-------|----------------------|-------|
| | | entry Pg | | entry M | | entry | | entry |
| with levers and gasket, top entry | CMV 06 G | 21 | MMV 06 G32 | 32 | | | | |
| with levers and gasket, top entry, high construction | | | MMAV 06 G25 | 25 | | | | |
| with levers and gasket, top entry, high construction | | | MMAV 06 G32 | 32 | | | | |
| with 4 pegs (for enclosures with 2 levers with gasket) | | | | | CHC 16 | | | |
| with 2 pegs (for enclosures with 1 lever with gasket) | | | | | CHC 16 L | | | |
| with 2 levers (for hoods with 4 pegs) | | | | | | | CHC 16 G | |
| with 1 lever (for hoods with 2 pegs) | | | | | | | CHC 16 LG | |

dimensions in mm

CMV G and MMV G (MMAV G)

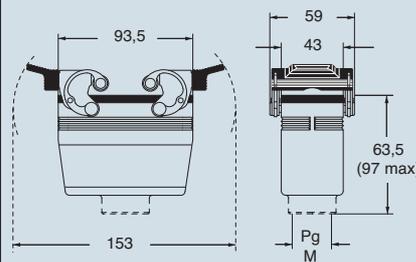


dimensions in mm


CHC





CHC L



CHC G

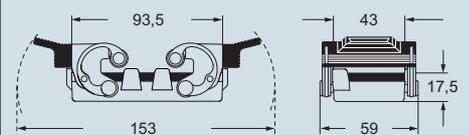

CHC LG

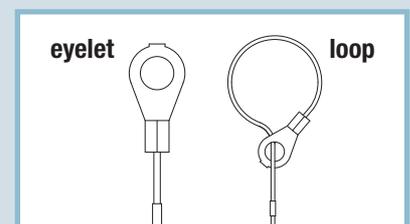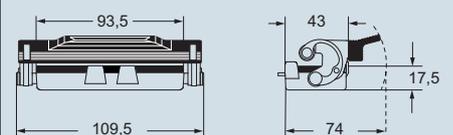

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice

830V - size 77.27