



inserts:	page:
CD 50 poles + ⊕	58
CDD 76 poles + ⊕	71
CSAH 32 poles + ⊕	89
CDA 32 poles + ⊕	102
CDC 32 poles + ⊕	103

insert dimensions:
2 x (66 x 16) mm

CHCW 50 and CHCW 50 G covers cannot be used together with coding pins. If this application is required, please contact ILME SpA.

housings and cover





hoods and cover




description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housings with lever	CHIW 50	—						
surface mounting housing, with lever	CHPW 50.21	21	MHPW 50.32	32				
surface mounting housing, with lever	CHPW 50.229	29 x 2	MHPW 50.250	50 x 2				
cover with 4 pegs (for housings with 2 levers) 1)	CHCW 50							
enclosure with pegs, side entry					CHOW 50	21	MHOW 50.25	25
enclosure with pegs, side entry							MHOW 50.32	32
enclosure with pegs, side entry, high construction					CAOW 50.29	29	MAOW 50.32	32
enclosure with pegs, top entry, high construction					CAVW 50.29	29	MAVW 50.32	32
cover with 2 levers (for enclosures with 4 pegs) 2)					CHCW 50 G			

panel cut-out for bulkhead mounting housing in mm

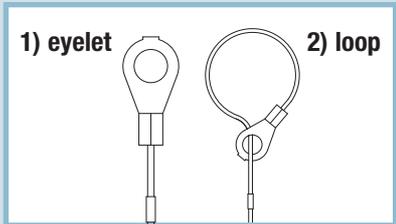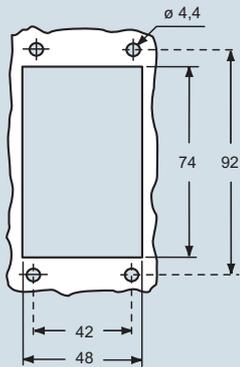


dimensions in mm

CHIW

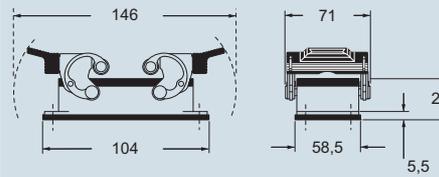

CHPW and MHPW

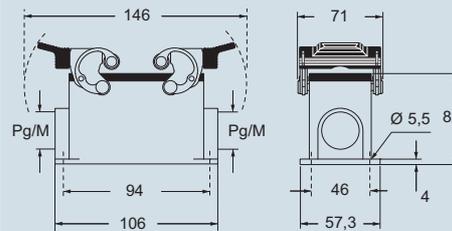


CHCW




dimensions in mm


CHOW (CAOW) and MHOW (MAOW)

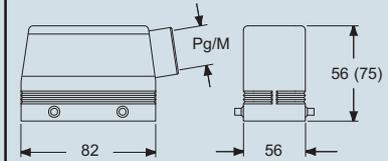

CAVW and MAVW

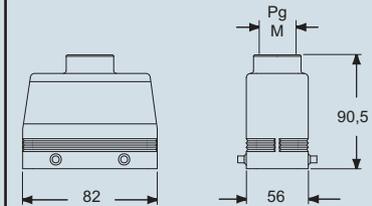

CHCW G

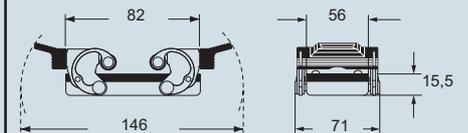

CALUS Type 4/4X/12



IP69K (compliant with DIN 40050-9)

dimensions shown are not binding and may be changed without notice

W-TYPE - size 66.40