

Product data sheet



Ilme connectors - CDD 216 P + PE

male insert, 108p+PE, crimp, 10A, 250V, for size 104.62 no.109-216



CDDM 108 N

<https://www.ac-solutions.be/en/product/cddm108n>

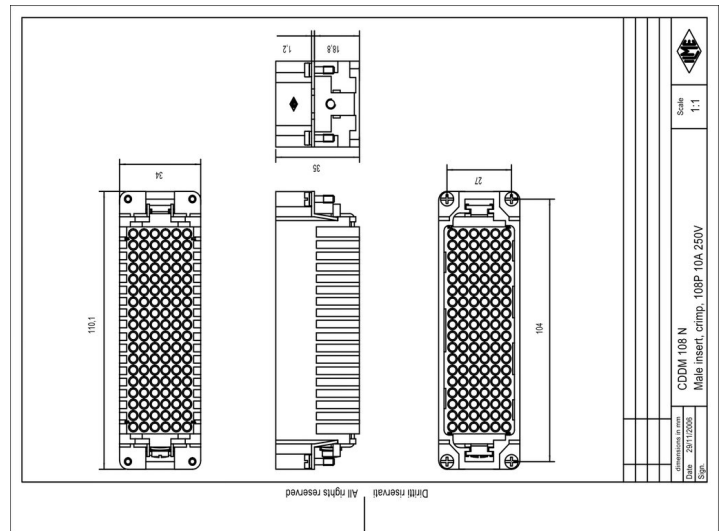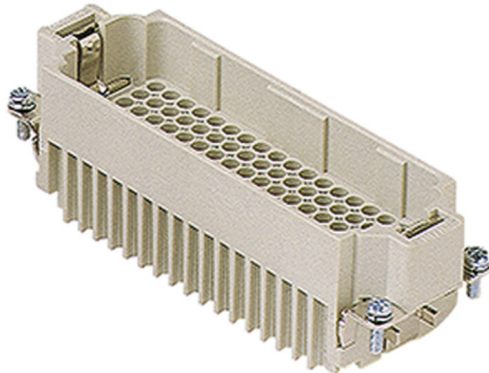

Specifications

General characteristics

Product Type	Standard insert
Insert series	CDD
Number of contacts	216 + PE (109-216)
Number of poles	216
Connection type	Crimp connection
Gender	Male
Size	104.62
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	26
AWG-range 2	14
Min. Cross section	0.14 mm ²
Max. Cross section	2.5 mm ²
Diameter male contact	1.6 mm
Pin numbers	109-216
Colour	Grey
Extra information	Contact insert without contacts

Product data sheet

Ilme connectors - CDD 216 P + PE

male insert, 108p+PE, crimp, 10A, 250V, for size 104.62 no.109-216



Remark	To be ordered with CDDM 108
--------	-----------------------------

Electrical parameters

Max. rated current	10 A
Nominal rated voltage	250 V
Over voltage category	III
Rated surge voltage	4 kV
Pollution degree	2

Material

Material insert	Thermoplastic
Inflammability class of insulation material acc. with UL94	V0