

Product data sheet

Techno connectoren


Junction box for resin filling 4 ways D7-13,5



IP66/IP68

THA.219.A1A

<https://www.ac-solutions.be/nl/product/tha219a1a>

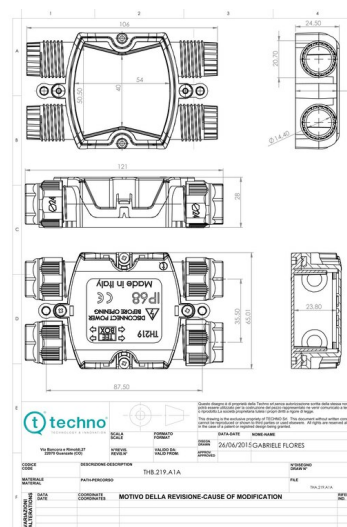

Specificaties

General Characteristics

Series	TEEBOX
Subseries	TH219
Inner dimensions	54 mm x 40 mm x 24 mm
Cable diameter min-max A	7,0 -13,5 mm
Cable diameter min-max B	7,0 -13,5 mm
Cable entries/exits	4 ways
Protection degree	IP66/IP68
Protection degree details	0,5 bar (5m/3h)
Lower temperature	-40 °C
Upper temperature	+125 °C
Note	? cable min-max 7,0 - 9,5 mm CH 19,0 mm ? cable min-max 7,0 - 13,5 mm CH 24,0 mm
Max. temperature	T85 16A 1,5 mm ²
Standards	TEST REPORT EN60529:1991+A1:2000 IP54: 2.6 l/min 10 min IP68: 5 MT-PROOF 3 h IP66: 100 l/min 3 min EN60998-1:2004 heating resistance

Material

Product data sheet

Techno connectoren

Junction box for resin filling 4 ways D7-13,5



Body	PA66 UL94 V2 GWT 850°C black - grey RAL 7035
Lock nuts	PA66 FV UL94 V0 GWT 960°C black - grey RAL 7035
Grommets	TPE-V
Co-moulded seal of lid	SEBS
Fixing screws of lid	M3 x 12,0 mm inox stainless steel